

N9032B PXA X-Series Signal Analyzer, Multi-Touch

2 Hz to 8.4, 13.6, 26.5, 44 or 50 GHz



Table of Contents

Data Sheet Definitions and Conditions	3
Frequency and Time Specifications	5
Amplitude Accuracy and Range Specifications	8
Frequency Response	10
Amplitude Accuracy and Range	17
Dynamic Range Specifications	18
Displayed Average Noise Level (DANL)	19
Residuals, Images, and Spurious Responses	23
Second-Harmonic Intercept (SHI)	24
Third-Order Intercept (TOI)	25
Phase Noise (SSB)	27
IQ Analyzer	28
10 MHz Analysis Bandwidth (Standard)	28
25 MHz Analysis Bandwidth (Option B25)	29
40 MHz Analysis Bandwidth (Option B40)	30
255 MHz Analysis Bandwidth (Option B2X)	32
1 GHz Analysis Bandwidth (Option R10)	35
1.5 GHz Analysis Bandwidth (Option R15)	38
2 GHz Analysis Bandwidth (Option R20)	41
General Specifications	44
Inputs and Outputs	45
Regulatory Information	49
Additional Resources	52

Data Sheet Definitions and Conditions

This data sheet provides performance information for Keysight N9032B Signal Analyzers.

Specifications describe the performance of parameters covered by the product warranty and apply to temperature ranges 0 to 55 °C, unless otherwise noted.

95th percentile values indicate the breadth of the population (approx. 2σ) of performance tolerances expected to be met in 95 percent of the cases with a 95 percent confidence, for any ambient temperature in the range of 20 to 30 °C. In addition to the statistical observations of a sample of instruments, these values include the effects of the uncertainties of external calibration references. These values are not warranted. These values are updated occasionally if a significant change in the statistically observed behavior of production instruments is observed.

Typical values (typ) describe additional product performance information that is not covered by the product warranty. It is performance beyond specifications that 80 percent of the units exhibit with a 95 percent confidence level over the temperature range 20 to 30 °C. Typical performance does not include measurement uncertainty.

Nominal values (nom) indicate expected performance or describe product performance that is useful in the application of the product but are not covered by the product warranty.

The analyzer will meet its specifications when:

- It is within its calibration cycle.
- Under auto couple control, except that Auto Sweep Time Rules = Accy
- For signal frequencies < 10 MHz, DC coupling applied.
- Analyzer is used in environment that falls within allowed operating range; and has been in that environment at least 2 hours before being turned on.
- Analyzer has been turned on at least 30 minutes with AutoAlign set to Normal; or, if Auto Align is set to Off or Partial, alignments must have been run recently enough to prevent an Alert message. Note that factory default is with the AutoAlign set to Light, which (compared to Normal) allows wider temperature changes before causing Alignments to run automatically. The benefit is that Alignments interrupt less frequently. The user can change AutoAlign to Normal if desired, and this setting will persist after power cycle or PRESET. If the Alert condition is changed from “Time and Temperature” to one of the disabled duration choices, the analyzer may fail to meet specifications without informing the user. In practice, the impact of such choices is primarily on Absolute Amplitude Accuracy. If temperature changes are small, the impact of Light vs Normal is negligible. Also, the user may invoke Align All at any time, to get the best possible accuracy.
- The term “mixer level” is used as a condition for many specifications in this document. This term is a conceptual quantity that is defined as follows: Mixer Level (dBm) = RF Input Power Level (dBm) - (Mechanical Attenuation) (dB) - (Electronic Attenuation) (dB).
- The term “attenuation” is used for many specifications in this document; this refers to the Mechanical Attenuator, unless otherwise stated.

Common Abbreviations

BW	bandwidth
FBP	full bypass path
FFT	fast Fourier transform
IQ	in-phase quadrature-phase (sample data)
IVL	Individual validated license (for export to restricted countries)
LNA	low-noise amplifier
LNP	low-noise path
LO	local oscillator
PA	pre-amplifier
MPB	microwave preselector bypass
RBW	resolution bandwidth (filter)
VBW	video bandwidth (filter)

Frequency and Time Specifications

Frequency option	Frequency range DC coupled	
508	2 Hz to 8.4 GHz	
513	2 Hz to 13.6 GHz	
526	2 Hz to 26.5 GHz	
544	2 Hz to 44 GHz	
550	2 Hz to 50 GHz	
Minimal frequency	DC coupled	AC coupled (option 508, 513 and 526)
PA off, LNA off	2 Hz	10 MHz
PA on	9 kHz	10 MHz
LNA on	20 MHz	20 MHz
Swept spectrum analysis (these bands are not applicable to wide-bandwidth IQ analysis)		
Swept frequency band	LO multiple (N)	Frequency range
0	1	2 Hz to 3.6 GHz
1	1	3.5 to 8.4 GHz
2	2	8.3 to 13.6 GHz
3	2	13.5 to 17.1 GHz
4	4	17.0 to 26.5 GHz
5	4	26.4 to 34.5 GHz
6	8	34.4 to 50 GHz
Frequency reference		
Accuracy (total)	$\pm [(\text{Initial accuracy}) + (\text{aging rate} \times \text{time since last adjustment}) + (\text{temperature stability})]$	
Aging rate	$\pm 3 \times 10^{-8}$ / year	
Temperature stability	$\pm 4.5 \times 10^{-9}$ over full temperature range	
Achievable initial calibration accuracy	$\pm 3.1 \times 10^{-8}$	
Example frequency reference accuracy	$= \pm (3 \times 10^{-8} + 4.5 \times 10^{-9} + 3.1 \times 10^{-8})$	
1 year after last adjustment	$= \pm 6.6 \times 10^{-8}$	
Residual FM		
Center frequency = 1 GHz, 10 Hz RBW, 10 Hz VBW	$\leq (0.25 \text{ Hz} \times N)$ p-p in 20 ms nominal (N = LO multiple, see band table above)	
Frequency readout accuracy (start, stop, center, marker)		
$\pm (\text{marker frequency} \times \text{frequency reference accuracy} + 0.10 \% \times \text{span} + 5 \% \times \text{RBW} + 2 \text{ Hz} + 0.5 \times \text{horizontal resolution})$ where horizontal resolution is span/(sweep points-1)		
Marker frequency counter		
Accuracy	$\pm (\text{marker frequency} \times \text{frequency reference accuracy} + 0.100 \text{ Hz})$	
Delta counter accuracy	$\pm (\text{delta frequency} \times \text{frequency reference accuracy} + 0.141 \text{ Hz})$	
Counter resolution	0.001 Hz	
Frequency span (FFT and swept mode)		
Range	0 Hz (zero span), 10 Hz to maximum frequency of instrument	
Resolution	2 Hz	
Accuracy		
Swept	$\pm (0.1 \% \times \text{span} + \text{horizontal resolution})$ where horizontal resolution is span/(sweep points –1)	
FFT	$\pm (0.1 \% \times \text{span} + \text{horizontal resolution})$ where horizontal resolution is span/(sweep points –1)	
Sweep time and triggering		
Range	Span = 0 Hz	1 μ s to 6000 s
	Span \geq 10 Hz	1 ms to 4000 s
Accuracy	Span \geq 10 Hz, swept	$\pm 0.01\%$ nominal
	Span \geq 10 Hz, FFT	$\pm 40\%$ nominal
	Span = 0 Hz	$\pm 0.01\%$ nominal
Trigger Delay	Span = 0 Hz or FFT	–150 to +500 ms
	Span \geq 10 Hz, swept	0 to 500 ms
	Resolution	0.1 μ s

Time gating		
Gate methods	Gated LO; Gated video; Gated FFT	
Gate length range (except method = FFT)	1 μs to 5.0 s	
Gate delay range	0 to 100.0 s	
Gate delay jitter	33.3 ns p-p (nom)	
Sweep trace) point range		
All spans	1 to 100,001	
Resolution bandwidth (RBW) filters (see also IQ Analysis section)		
Range (with –3 dB bandwidth, standard)	1 Hz to 3 MHz (10% steps), 4, 5, 6, 8, and 10 MHz	
Bandwidth accuracy (power)		
RBW range	Accuracy	
1 Hz to 100 kHz	± 0.5% (± 0.022 dB)	
110 kHz to 1.0 MHz (< 3.6 GHz CF)	± 1.0% (± 0.044 dB)	
1.1 to 2 MHz (< 3.6 GHz CF)	± 0.07 dB (nominal)	
2.2 to 3 MHz (< 3.6 GHz CF)	0 to –0.2 dB (nominal)	
4 to 10 MHz (< 3.6 GHz CF)	0 to –0.4 dB (nominal)	
Bandwidth accuracy (-3 dB)		
RBW range	Accuracy	
1 Hz to 1.3 MHz	± 2% (nominal)	
1.5 MHz to 3 MHz		
(≤ 3.6 GHz center frequency)	± 7% (nominal)	
(> 3.6 GHz center frequency)	± 8% (nominal)	
4 MHz to 10 MHz		
(≤ 3.6 GHz center frequency)	± 15% (nominal)	
(> 3.6 GHz center frequency)	± 20% (nominal)	
Selectivity (–60 dB/–3 dB)	4.1: 1 (nominal)	
EMI bandwidths (CISPR 16-1-1; requires N90EMEMCB or N6141EM0E)	200 Hz, 9 kHz, 120 kHz, 1 MHz	
EMI bandwidths (MIL-STD-461; requires N90EMEMCB or N6141EM0E)	10 Hz, 100 Hz, 1 kHz, 10 kHz, 100 kHz, 1 MHz	
Preselector bandwidth		
The preselector can have a significant passband ripple. To avoid ambiguous results, the -4dB bandwidth is characterized		
Center frequency	Mean bandwidth (- 4 dB)	
	Option 508, 513 and 526	Option 544 and 550
5 GHz	58 MHz	46 MHz
10 GHz	57 MHz	52 MHz
15 GHz	59 MHz	53 MHz
20 GHz	64 MHz	55 MHz
25 GHz	74 MHz	56 MHz
35 GHz	N/A	62 MHz
44 GHz		70 MHz
50 GHz		76 MHz
Video bandwidth (VBW) filters		
Range	1 Hz to 3 MHz (10% steps), 4, 5,6, 8 MHz, and wide open (labeled 50 MHz)	
Accuracy	± 6%, nominal	
Detector types		
Normal, peak, sample, negative peak, log power average, RMS average, and voltage average		
With N90EMEMCB or N6141EM0E	Add quasi-peak and EMI average to above	

Triggers and Gating

Trigger/Gate sources				
	Swept trigger	Gate source	Wide bandwidth IQ trigger	Supplemental information
Free Run	Y		Y	
External 1	Y	Y	Y	Jitter up to ~33 ns p-p (nominal)
External 2	Y	Y	Y	
External 3			Y	Jitter < 20 ps (nominal)
RF Burst	Y	Y		IF Path ≤ 40 MHz only
Video (IF Mag)	Y		Y	In 255 MHz IF Path only; at greater bandwidths, ADC trigger is similar
ADC			Y	Similar to Video, but operates digitally on mag[I,Q], prior to decimation, filtering, and corrections. Available for bandwidth >255 MHz.
Line	Y	Y	Y	
Periodic	Y	Y	Y	Repetitive “frame” trigger, at precise interval, following an External or RF Burst trigger
TV	Y	Y		
Triggers				
Video (independent of Display Scaling and Reference Level)		Specifications		Supplemental information
Minimum settable level		-170 dBm		Useful range limited by noise
Maximum usable level				Highest allowed mixer level (the highest allowed mixer level depends on the IF Gain. It is nominally –10 dBm for Preamp Off and IF Gain = Low) + 2 dB (nominal)
Detector and sweep type relationships				
			Supplemental information	
Sweep Type = Swept				
Detector = Normal, Peak, Sample or Negative Peak			Triggers on the signal before detection, which is similar to the displayed signal	
Detector = Average			Triggers on the signal before detection, but with a single-pole filter added to give similar smoothing to that of the average detector	
Sweep Type = FFT			Triggers on the signal envelope in a bandwidth wider than the FFT width	
RF Burst		Specifications		Supplemental information
Level range		–40 to –10 dBm plus attenuation (nominal)		Noise will limit trigger level range at high frequencies, such as above 15 GHz
Level Accuracy				
With positive slope trigger. Trigger level with negative slope is nominally 1 to 4 dB lower than positive slope.				
Absolute		± 2 dB + Absolute Amplitude Accuracy (nominal)		
Relative		± 2 dB (nominal)		
Bandwidth (-10 dB)				
Most cases (including RF Burst Level Type = Relative)		> 80 MHz (nominal)		
Start Freq < 300 MHz				
RF Burst Level Type = Absolute				
Sweep Type = Swept		16 MHz (nominal)		
Sweep Type = FFT				
FFT Width > 25 MHz		> 80 MHz (nominal)		
FFT Width 8 to 25 MHz		30 MHz (nominal)		
FFT Width < 8 MHz		16 MHz (nominal)		
Frequency Limitations				If the start or center frequency is too close to zero, LO feedthrough can degrade or prevent triggering. How close is too close depends on the bandwidth listed above.
Amplitude Requirements				–65 dBm minimum video carrier power at the input mixer, nominal

Amplitude Accuracy and Range Specifications

Amplitude characteristics vary by user-selectable front-end path. Swept SA measurements are normally made with preselector on (in circuit). These settings impact amplitude accuracy and range.

Front end settings			
1a	Standard path	Preselector	Default selection following power-on, boot-up, or PRESET. Settings provide best dynamic range and lowest internally-generated distortion. Suitable for harmonics, IMD, spurious in presence of large signals, etc. unless noise-limited.
1b		Preselector, LNA on	Requires P08, P13, P26, P44, P4L, P50, or P5L. Settings provide lower DANL, compared to 1a, while preserving very good dynamic range. Suitable for distortion measurements (harmonics, IMD, etc.) when a lower noise floor is needed.
1c		Preselector, PA on	Requires P08, P13, P26, P44, P4L, P50, or P5L. Settings provide lower DANL, compared to 1b.
1d		Preselector, LNA on, PA on	Requires P08, P13, P26, P44, P4L, P50, or P5L. Settings provide lowest possible DANL, compared to 1c. Best for finding low-level spurs, oscillations, etc. near the noise floor. Allows use of wider RBW setting to achieve equivalent noise floors, so can make spur searching faster.
2a	Low-noise path (LNP)	Preselector, LNP	Bypasses the preamplifier. Settings provide the lowest distortion and best dynamic range, yet with lower DANL at higher frequencies, when compared with 1a. Path not active below 3.6 GHz.
2b		Preselector, LNP, LNA on	Bypasses the preamplifier. Requires P08, P13, P26, P44, P4L, P50, or P5L. Settings provide the lower DANL, compared to 2a, while preserving very good dynamic range. Path not active at below 3.6 GHz.
3a	Microwave Preselector Bypass path (MPB)	MPB	Bypasses preselector. Settings provide very good EVM floor at mid-high input power region (using attenuation), including below 3.6 GHz. Good for wideband digitizer and FFT measurements. Recommend using path 4a if above 3.6 GHz.
3b		LNA on	Bypasses preselector. Requires P08, P13, P26, P44, P4L, P50, or P5L. Settings provide best EVM at low input power for below 3.6 GHz. Good for wideband digitizer and FFT measurements. Otherwise use path 4b if above 3.6 GHz.
3c		PA on	Bypasses preselector. Requires P08, P13, P26, P44, P4L, P50, or P5L. Good for wideband digitizer and FFT measurements. Settings allowed only for very low power levels since preselector is bypassed. Not generally recommended for digital demodulation.
3d		LNA on, PA on	Bypasses preselector. Requires P08, P13, P26, P44, P4L, P50, or P5L. Good sensitivity for narrowband swept measurements only. Not generally recommended for digital demodulation.
4a	Full Bypass path (FBP)	LNP, MPB	Bypasses both preamplifier and preselector. Settings provide best EVM floor for mid-high input power region (using attenuation) for above 3.6 GHz. Best for wideband digitizer and FFT measurements. Otherwise use path 3a if below 3.6 GHz.
4b		LNP, MPB, LNA on	Bypasses both preamplifier and preselector. Requires P08, P13, P26, P44, P4L, P50, or P5L. Settings provide best EVM floor for low input power region (using attenuation) for above 3.6 GHz. Best for wideband digitizer and FFT measurements. Otherwise use path 3b if below 3.6 GHz.

Amplitude range	
Measurement range	Displayed average noise level (DANL) to +30 dBm (for preamp Off) DANL to +24 dBm (for frequency opts ≤ 526 with preamp On) DANL to +20 dBm (for frequency opts > 526 with preamp On)
Input mechanical attenuator range (2 Hz to 50 GHz)	0 to 70 dB in 2 dB steps
Electronic attenuator (option EA3)	
Frequency range	2 Hz to 3.6 GHz
Attenuation range	
Electronic attenuator range	0 to 24 dB, 1 dB steps
Full attenuation range (mechanical + electronic)	0 to 94 dB, 1 dB steps
Maximum safe input level (max applied to RF input connector)	
Average total power (with and without preamp)	+30 dBm (1 W)
Peak pulse power (< 10 μs pulse width, < 1% duty cycle, and input attenuation ≥ 30 dB)	+50 dBm (100 W)
DC Volts	
DC coupled	± 0.2 Vdc
AC coupled (Option 508,513 or 526)	± 100 Vdc
Display range	
Log scale	0.1 to 1 dB/division in 0.1 dB steps 1 to 20 dB/division in 1 dB steps (10 display divisions)
Linear scale	10 divisions
Scale units	dBm, dBmV, dBμV, dBmA, dBμA, V, W, A

Frequency Response

1a. Standard path frequency response (swept, preselector on, LNA off, PA off) 10 dB input attenuation, relative to reference conditions (50 MHz), preselector centering applied above 3.6 GHz			
Frequency	Full range	20 to 30° C	Typical, unless otherwise stated
2 Hz to 30 MHz	± 0.50 dB	± 0.40 dB	± 0.15 dB
> 30 MHz to 50 MHz	± 0.40 dB	± 0.35 dB	± 0.20 dB
> 50 MHz to 3.6 GHz	± 0.60 dB	± 0.35 dB	± 0.20 dB
> 3.6 to 5.2 GHz	± 3.50 dB	± 1.70 dB	± 1.00 dB
> 5.2 to 8.4 GHz	± 2.50 dB	± 1.50 dB	± 0.60 dB
> 8.4 to 13.6 GHz	± 2.00 dB	± 1.50 dB	± 0.60 dB
> 13.6 to 17.1 GHz	± 2.20 dB	± 1.50 dB	± 0.60 dB
> 17.1 to 22.0 GHz	± 2.30 dB	± 1.50 dB	± 0.60 dB
> 22.0 to 26.5 GHz	± 2.50 dB	± 2.00 dB	± 0.70 dB
> 26.5 to 34.5 GHz	± 3.50 dB	± 2.30 dB	± 1.00 dB
> 34.5 to 36.5 GHz	± 5.20 dB	± 2.50 dB	± 1.50 dB
> 36.5 to 45.0 GHz	± 5.20 dB	± 3.10 dB	± 1.50 dB
> 45.0 to 50.0 GHz	± 5.20 dB	± 3.10 dB	± 1.50 dB

1b. Standard path, LNA on frequency response (swept, preselector on, LNA on, PA off) 0 dB input attenuation, relative to reference conditions (50 MHz), preselector centering applied above 3.6 GHz			
Frequency	Full range	20 to 30° C	Typical, unless otherwise stated
30 MHz to 3.6 GHz	± 0.70 dB	± 0.50 dB	± 0.20 dB
> 3.6 to 5.2 GHz	± 3.50 dB	± 1.90 dB	± 1.10 dB
> 5.2 to 8.4 GHz	± 2.70 dB	± 1.70 dB	± 0.70 dB
> 8.4 to 13.6 GHz	± 2.30 dB	± 1.70 dB	± 0.70 dB
> 13.6 to 17.1 GHz	± 2.60 dB	± 1.70 dB	± 0.70 dB
> 17.1 to 22.0 GHz	± 2.80 dB	± 1.90 dB	± 0.70 dB
> 22.0 to 26.5 GHz	± 3.00 dB	± 2.30 dB	± 0.80 dB
> 26.5 to 34.5 GHz	± 3.70 dB	± 2.60 dB	± 1.20 dB
> 34.5 to 36.5 GHz	± 5.30 dB	± 3.20 dB	± 1.60 dB
> 36.5 to 45.0 GHz	± 5.30 dB	± 3.20 dB	± 1.60 dB
> 45.0 to 50.0 GHz	± 5.30 dB	± 3.20 dB	± 1.60 dB

1c. Standard path, PA on frequency response (swept, preselector on, LNA off, PA on) 0 dB input attenuation, relative to reference conditions (50 MHz), preselector centering applied above 3.6 GHz			
Frequency	Full range	20 to 30° C	Typical, unless otherwise stated
9 kHz to 100 kHz			± 0.40 dB (nom)
> 100 kHz to 50 MHz	± 0.80 dB	± 0.68 dB	± 0.35 dB
> 50 MHz to 3.6 GHz	± 0.80 dB	± 0.60 dB	± 0.20 dB
> 3.6 to 5.2 GHz	± 3.50 dB	± 2.30 dB	± 1.20 dB
> 5.2 to 8.4 GHz	± 2.70 dB	± 2.00 dB	± 0.80 dB
> 8.4 to 13.6 GHz	± 2.50 dB	± 2.00 dB	± 0.80 dB
> 13.6 to 17.1 GHz	± 2.50 dB	± 2.00 dB	± 0.95 dB
> 17.1 to 22.0 GHz	± 2.90 dB	± 2.20 dB	± 0.95 dB
> 22.0 to 26.5 GHz	± 3.70 dB	± 2.70 dB	± 1.20 dB
> 26.5 to 34.5 GHz	± 4.00 dB	± 2.90 dB	± 1.30 dB
> 34.5 to 36.5 GHz	± 5.20 dB	± 3.40 dB	± 1.60 dB
> 36.5 to 45.0 GHz	± 5.20 dB	± 3.40 dB	± 1.60 dB
> 45.0 to 50.0 GHz	± 5.20 dB	± 3.40 dB	± 1.60 dB

1d. Standard path, LNA on, PA on frequency response (swept, preselector on, LNA on, PA on) 0 dB input attenuation, relative to reference conditions (50 MHz), preselector centering applied above 3.6 GHz			
Frequency	Full range	20 to 30° C	Typical, unless otherwise stated
< 3.6 GHz	(if tuning < 3.6 GHz, then standard path with LNA on is used)		
3.6 to 5.2 GHz	± 3.50 dB	± 2.10 dB	± 1.30 dB
> 5.2 to 8.4 GHz	± 2.80 dB	± 1.80 dB	± 0.75 dB
> 8.4 to 13.6 GHz	± 2.40 dB	± 1.80 dB	± 0.75 dB
> 13.6 to 17.1 GHz	± 2.40 dB	± 1.80 dB	± 0.75 dB
> 17.1 to 22.0 GHz	± 2.70 dB	± 2.10 dB	± 0.75 dB
> 22.0 to 26.5 GHz	± 3.20 dB	± 2.50 dB	± 0.90 dB
> 26.5 to 34.5 GHz	± 3.90 dB	± 2.80 dB	± 1.30 dB
> 34.5 to 36.5 GHz	± 5.30 dB	± 3.40 dB	± 1.70 dB
> 36.5 to 45.0 GHz	± 5.30 dB	± 3.40 dB	± 1.70 dB
> 45.0 to 50.0 GHz	± 5.80 dB	± 3.40 dB	± 1.70 dB

2a. Low-noise path (LNP) frequency response (low-noise path enabled, preselector on, LNA off, PA off) 10 dB input attenuation, relative to reference conditions (50 MHz), preselector centering applied above 3.6 GHz			
Frequency	Full range	20 to 30° C	Typical, unless otherwise stated
< 3.6 GHz	If tuning to <3.6 GHz, then actually using Standard Path		
3.6 to 5.2 GHz	± 3.50 dB	± 1.80 dB	± 1.00 dB
> 5.2 to 8.4 GHz	± 2.50 dB	± 1.50 dB	± 0.75 dB
> 8.4 to 13.6 GHz	± 2.00 dB	± 1.50 dB	± 0.75 dB
> 13.6 to 17.1 GHz	± 2.00 dB	± 1.50 dB	± 0.75 dB
> 17.1 to 22.0 GHz	± 2.50 dB	± 2.00 dB	± 0.90 dB
> 22.0 to 26.5 GHz	± 3.00 dB	± 2.50 dB	± 1.05 dB
> 26.5 to 34.5 GHz	± 3.60 dB	± 2.80 dB	± 1.10 dB
> 34.5 to 36.5 GHz	± 5.30 dB	± 3.10 dB	± 1.40 dB
> 36.5 to 45.0 GHz	± 4.40 dB	± 3.10 dB	± 1.40 dB
> 45.0 to 50.0 GHz	± 5.30 dB	± 3.10 dB	± 1.40 dB

2b. Low-noise path (LNP) frequency response (low-noise path enabled, preselector on, LNA on, PA off) 0 dB input attenuation, relative to reference conditions (50 MHz), preselector centering applied above 3.6 GHz	
Frequency	Frequency response (nominal)
< 3.6 GHz	If tuning to <3.6 GHz, then actually using Standard Path with LNA ON
3.6 to 8.4 GHz	± 0.80 dB
> 8.4 to 17.1 GHz	± 0.70 dB
> 17.1 to 26.5 GHz	± 1.00 dB
> 26.5 to 34.5 GHz	± 1.00 dB
> 34.5 to 50.0 GHz	± 1.40 dB

3a. Microwave preselector bypass (MPB) path frequency response (MBP enabled, LNA off, PA off) 10 dB input attenuation, relative to reference conditions (50 MHz),

Frequency	Full range	20 to 30° C	Typical, unless otherwise stated
3.6 to 8.4 GHz	± 1.40 dB	± 1.00 dB	± 0.50 dB
> 8.4 to 13.6 GHz	± 1.60 dB	± 1.10 dB	± 0.55 dB
> 13.6 to 17.1 GHz	± 1.80 dB	± 1.10 dB	± 0.55 dB
> 17.1 to 22.0 GHz	± 2.00 dB	± 1.40 dB	± 0.60 dB
> 22.0 to 26.5 GHz	± 2.20 dB	± 1.60 dB	± 0.70 dB
> 26.5 to 34.5 GHz	± 2.90 dB	± 1.80 dB	± 0.90 dB
> 34.5 to 36.5 GHz	± 5.50 dB	± 3.00 dB	± 1.50 dB
> 36.5 to 45.0 GHz	± 4.00 dB	± 3.00 dB	± 1.50 dB
> 45.0 to 50.0 GHz	± 5.50 dB	± 3.00 dB	± 1.50 dB

3b, 3c, 3d. Microwave preselector bypass (MPB) path frequency response (MBP path enabled, relative to 10 dB, excludes 0 dB setting)

Frequency	3b. MPB, LNA on (0 dB input attenuation) (nominal)	3c. Std, PA on (0 dB input attenuation) (nominal)	3d. Std, LNA on, PA on (0 dB input attenuation) (nominal)
3.6 GHz to 8.4 GHz	± 0.40 dB	± 0.30 dB	± 0.40 dB
> 8.4 to 13.6 GHz	± 0.50 dB	± 0.40 dB	± 0.50 dB
> 13.6 to 17.1 GHz	± 0.50 dB	± 0.40 dB	± 0.50 dB
> 17.1 to 26.5 GHz	± 0.50 dB	± 0.50 dB	± 0.60 dB
> 26.5 to 34.5 GHz	± 0.60 dB	± 0.60 dB	± 0.70 dB
> 34.5 to 50 GHz	± 1.10 dB	± 1.20 dB	± 1.10 dB

4a, 4b. Full bypass (FBP) path frequency response (full bypass path enabled)

Frequency	4a. FBP (10 dB input attenuation) (nominal)	4b. FBP, LNA on (0 dB input attenuation) (nominal)
3.6 to 8.4 GHz	± 0.40 dB	± 0.40 dB
> 8.4 to 13.6 GHz	± 0.40 dB	± 0.50 dB
> 13.6 to 17.1 GHz	± 0.40 dB	± 0.50 dB
> 17.1 to 26.5 GHz	± 0.40 dB	± 0.50 dB
> 26.5 to 34.5 GHz	± 0.50 dB	± 0.60 dB
> 34.5 to 50 GHz	± 1.00 dB	± 1.00 dB

Electronic attenuator (option EA3) frequency response			
Maximum error relative to reference conditions (50 MHz). Mechanical attenuation set to default/calibrated setting of 10 dB.			
Frequency	Full range	20 to 30° C	Typical, unless stated otherwise
2 Hz to 9 kHz	± 0.80 dB	± 0.60 dB	± 0.25 dB
9 kHz to 50 MHz	± 0.80 dB	± 0.60 dB	± 0.25 dB
50 MHz to 3.6 GHz	± 0.60 dB	± 0.40 dB	± 0.20 dB

Attenuator switching uncertainty (50 MHz reference frequency, relative to 10 dB reference setting, LNA off, PA off)		
1a. Standard path (swept, preselector on, LNA off, PA off)		
Attenuation	Full range	Typical
12 to 40 dB	± 0.14 dB	± 0.04 dB
2 to 8 dB, or > 40 dB	± 0.18 dB	± 0.06 dB
0 dB		± 0.05 dB (nominal)
Attenuation >2 dB at other frequencies (nominal)		
2 Hz to 3.6 GHz	± 0.3 dB	
> 3.6 to 8.4 GHz	± 0.5 dB	
> 8.4 to 26.5 GHz	± 0.7 dB	
> 26.5 to 50 GHz	± 1.0 dB	

Total absolute amplitude accuracy (at 50 MHz)

At 50 MHz, 10 dB attenuation, RBW <= 1 MHz, input signal -10 to -50 dBm, all settings auto-coupled except Auto Swp Time = Accy, any Reference Level, any vertical Scale.

Path	Full range	20 to 30 °C	Typical, unless stated otherwise
1a. Std	± 0.35 dB	± 0.30 dB	± 0.10 dB
1b. Std (LNA on, preamp off)	± 0.40 dB	± 0.35 dB	± 0.15 dB
1c. Std (LNA off, preamp on)	± 0.40 dB	± 0.35 dB	± 0.15 dB

With electronic attenuator

(at 50MHz, 0 to 24 dB attenuation, RBW <= 1 MHz, input signal -7 to -25 dBm, all settings auto-coupled except Auto Swp Time = Accy, any Reference Level, any vertical Scale)

	± 0.35 dB	± 0.30 dB	± 0.10 dB
For absolute amplitude accuracy at any frequency, use the following formulas:			
At any frequency	± (Abs Amp at 50 MHz + Frequency Response)		
Wide range of signal levels, resolution bandwidths, reference levels, attenuation = 10 dB, 10 Hz to 3.6 GHz	± 0.20 dB, 95 th percentile		

Note 1: Absolute amplitude accuracy is the total of all amplitude measurement errors, and applies over the following subset of settings and conditions:

- 1 Hz ≤ RBW ≤ 1 MHz
- Input signal -10 to -50 dBm (details below)
- Input attenuation 10 dB
- Span < 5 MHz (nominal additional error for span ≥ 5 MHz is 0.02 dB)
- All settings auto-coupled except Swp Time Rules = Accuracy
- Combinations of low signal level and wide RBW use VBW ≤ 30 kHz to reduce noise
- When using FFT sweeps, the signal must be at the center frequency.

This absolute amplitude accuracy specification includes the sum of the following individual specifications under the conditions listed above: Scale Fidelity, Reference Level Accuracy, Display Scale Switching Uncertainty, Resolution Bandwidth Switching Uncertainty, 50 MHz Amplitude Reference Accuracy, and the accuracy with which the instrument aligns its internal gains to the 50 MHz Amplitude Reference. The only difference between signals within the range above -50 dBm and those signals below that level is the scale fidelity. Our specifications and experience show no difference between signals above and below this level. The only reason our Absolute Amplitude Uncertainty specification does not go below this level is that noise detracts from our ability to verify the performance at all levels with acceptable test times and yields. So the performance is not warranted at lower levels, but we fully expect it to be the same.

Note 2: Absolute amplitude accuracy for a wide range of signal and measurement settings, covers the 95th percentile proportion with 95% confidence. Here are the details of what is covered and how the computation is made:

The wide range of conditions of RBW, signal level, VBW, reference level and display scale are described above.

There are 44 quasi-random combinations used, tested at a 50 MHz signal frequency.

We compute the 95th percentile proportion with 95% confidence for this set observed over a statistically significant number of instruments.

Also, the frequency response relative to the 50 MHz response is characterized by varying the signal across a large number of quasi-random verification frequencies that are chosen to not correspond with the frequency response adjustment frequencies.

We again compute the 95th percentile proportion with 95% confidence for this set observed over a statistically significant number of instruments.

We also compute the 95th percentile accuracy of tracing the calibration of the 50 MHz absolute amplitude accuracy to a national standards organization.

We also compute the 95th percentile accuracy of tracing the calibration of the relative frequency response to a national standards organization

We take the root-sum-square of these four independent Gaussian parameters

To that RSS we add the environmental effects of temperature variations across the 20 to 30°C range.

These computations and measurements are made with the mechanical attenuator only in circuit, set to the reference state of 10 dB.

A similar process is used for computing the result when using the electronic attenuator under a wide range of settings: all even settings from 4 through 24 dB inclusive, with the mechanical attenuator set to 10 dB. The 95th percentile result was 0.20 dB.

VSWR (voltage standing wave ratio) at RF Input (95th percentile)					
Standard path, 10 dB input attenuation, 50 MHz (reference condition)			1.09:1 (nominal)		
Standard path, 0 dB input attenuation, 0.01 to 3.6 GHz			2.05:1 (nominal)		
Frequency	Option		1a Std, LNA off, PA off (10 dB attenuation)	1b Std, LNA on, PA off 1d Std, LNA on, PA on IF Path ≤ 40 MHz (0 dB attenuation)	1c Std, LNA off, PA on IF Path ≤ 40 MHz (0 dB attenuation)
	508, 513, and 526	544 and 550			
10 MHz to 3.6 GHz	x		1.20	1.30	1.70
10 MHz to 3.6 GHz		x	1.20	1.30	1.70
3.6 to 8.4 GHz	x		1.30	1.50	1.60
3.6 to 8.4 GHz		x	1.30	1.50	1.60
8.4 to 13.6 GHz	x		1.50	1.60	1.60
8.4 to 13.6 GHz		x	1.30	1.40	1.50
13.6 to 17.1 GHz	x		1.60	1.70	1.70
13.6 to 17.1 GHz		x	1.30	1.40	1.40
17.1 to 26.5 GHz	x		1.80	1.80	1.80
17.1 to 26.5 GHz		x	1.40	1.40	1.50
26.5 to 34.5 GHz		x	1.50	1.60	1.60
34.5 to 50 GHz		x	1.70	1.70	1.80

The magnitude of the mismatch over the range of frequencies will be very similar between MPB and non-MPB operation, between LNP and non-LNP operation, and between FBP and non-FBP operation, but the details, such as the frequencies of the peaks and valleys, will shift.

VSWR Plots

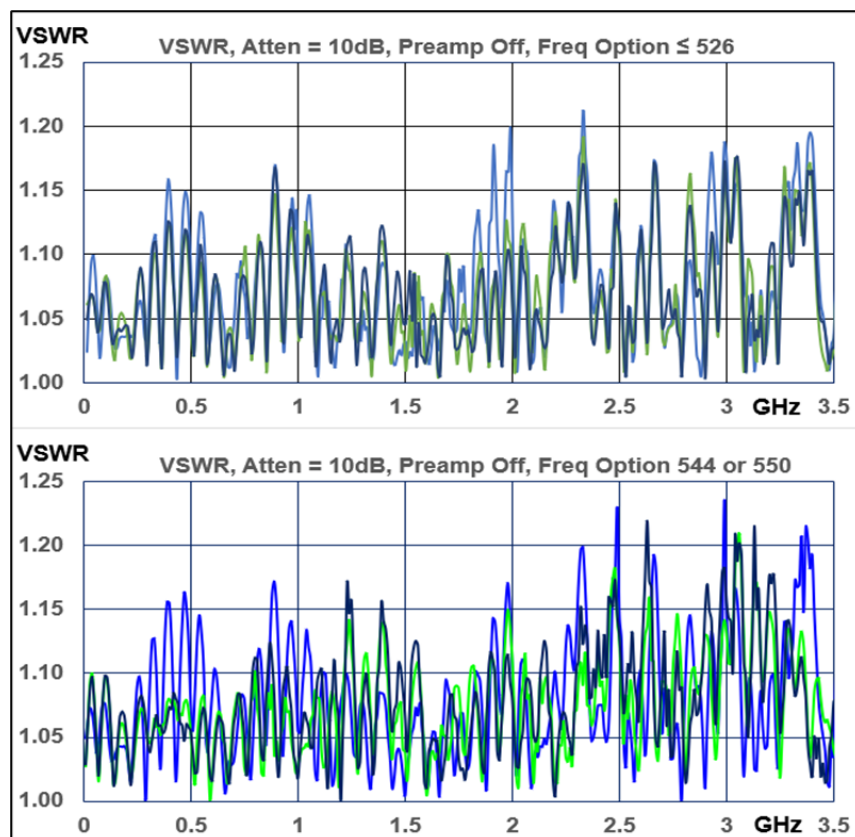


Figure 1. VSWR vs. frequency (0 to 3.5 GHz), 1a. Standard Path, 10 dB attenuation, measured on 3 units

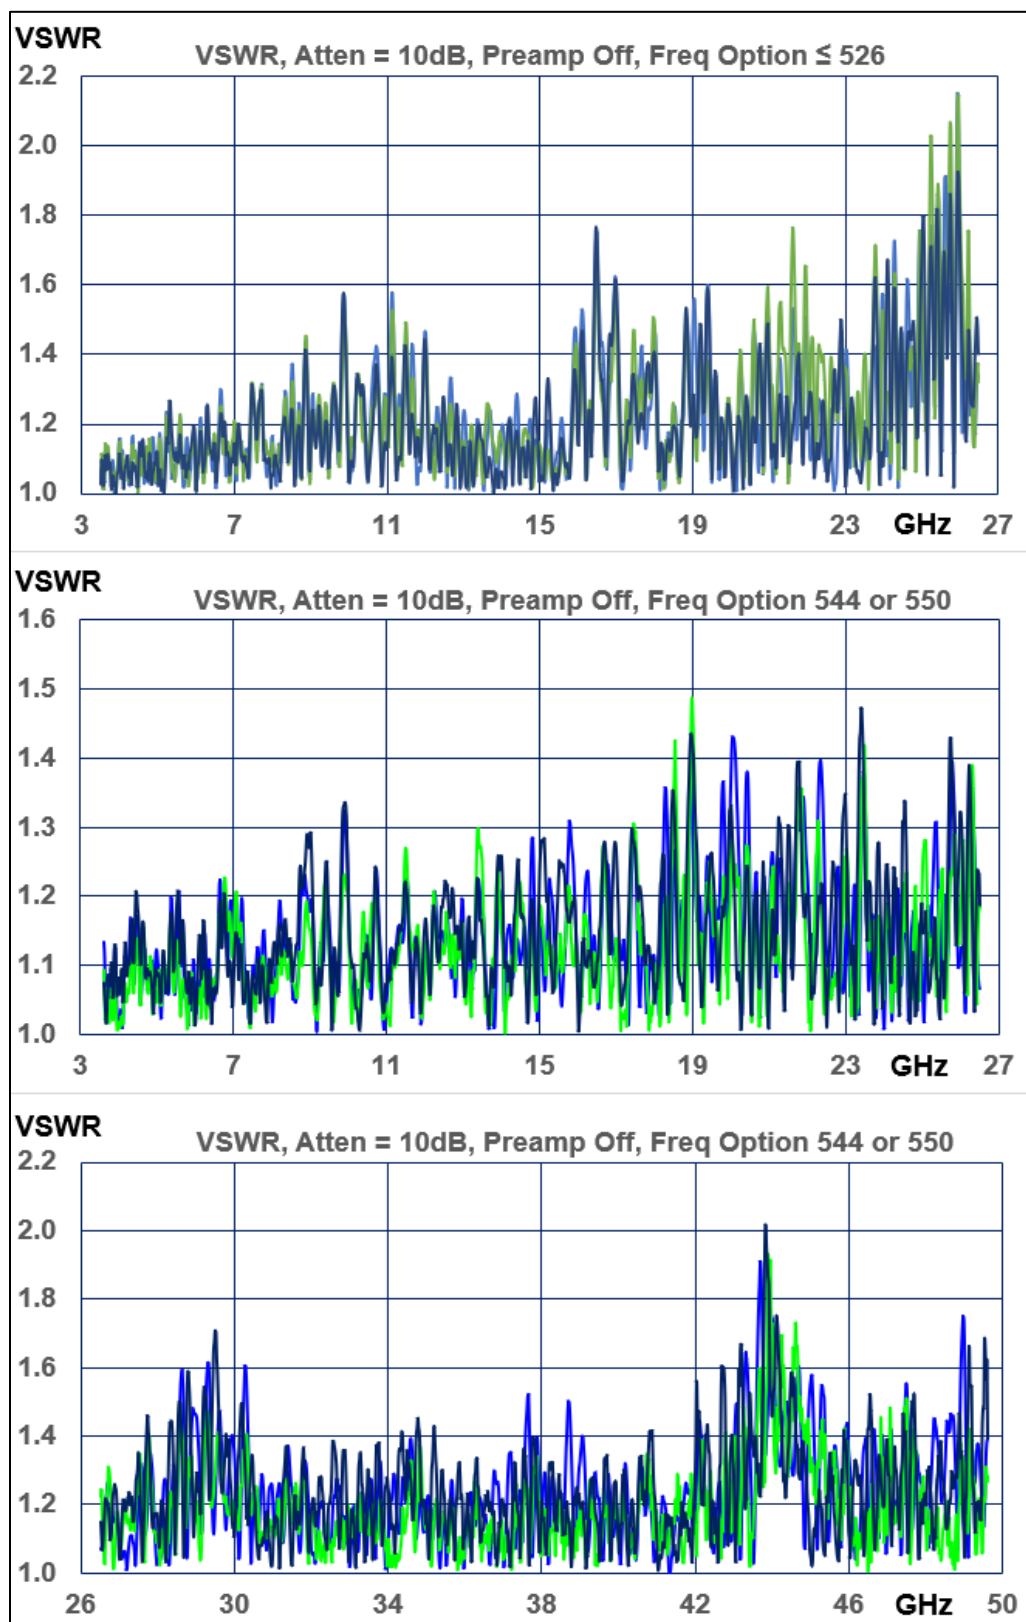


Figure 2: VSWR vs. frequency (3.5 to 26.5 GHz, and 26.5 to 50 GHz), 1a. Standard Path, 10 dB attenuation, measured on 3 units

Amplitude Accuracy and Range

Resolution bandwidth switching uncertainty (reference to 30 kHz RBW), 20 to 30 °C		
1 Hz to 1.5 MHz RBW		< ± 0.03 dB
1.6 MHz to 2.7 MHz RBW		< ± 0.05 dB
3 MHz RBW		± 0.10 dB
4, 5, 6, 8, 10 MHz RBW		± 0.30 dB
Reference level		
Range		
Log scale		-170 to +30 dBm in 0.01 dB steps
Linear scale		707 pV to 7.07 V with 0.11% (0.01 dB) resolution
Accuracy (Only affects the display, not the measurement, so it causes no additional error in measurement results from trace data or markers.)		0 dB
Display scale switching uncertainty		
Switching between linear and log (Only affects the display, not the measurement, so it causes no additional error in measurement results from trace data or markers.)		0 dB
Log scale/div switching (Only affects the display, not the measurement, so it causes no additional error in measurement results from trace data or markers.)		0 dB
Display scale fidelity (Log-linear fidelity, relative to the reference condition -25 dBm input through 10 dB attenuation, thus -35 dBm at the input mixer)		
Input mixer level	Full range	Typical
-18 dBm ≤ ML ≤ -10 dBm	± 0.10 dB total	± 0.04 dB
ML < -18 dBm input mixer level	± 0.07 dB	± 0.02 dB
Preamplifiers (2 stages: Low-Noise Amplifier LNA, Pre-Amplifier PA)		
	Low-Noise Amplifier (LNA)	Pre-Amplifier (PA)
Option P08	20 MHz to 8.4 GHz	9 kHz to 8.4 GHz
Option P13	20 MHz to 13.6 GHz	9 kHz to 13.6 GHz
Option P26	20 MHz to 26.5 GHz	9 kHz to 26.5 GHz
Option P44, P4L	20 MHz to 44 GHz	9 kHz to 44 GHz
Option P50, P5L	20 MHz to 50 GHz	9 kHz to 50 GHz
Noise figure	4 to 8 dB (nominal)	10 dB (nominal)
Gain	20 dB (nominal)	30 dB (nominal)
	When LNA and PA are used simultaneously, gain = 40 dB (nominal)	

Dynamic Range Specifications

1 dB Gain Compression

Notes:

- Large signals, even at frequencies not shown on the screen, can cause the analyzer to mismeasure on-screen signals because of two-tone gain compression. This specification tells how large an interfering signal must be in order to cause a 1 dB change in an on-screen signal.
- Specified at 1 kHz RBW with 100 kHz tone spacing. The compression point will nominally equal the specification for tone spacing greater than 5 times the prefilter bandwidth. At smaller spacings, ADC clipping may occur at a level lower than the 1 dB compression point.
- Reference level and off-screen performance: The reference level (RL) behavior differs from some earlier analyzers in a way that makes this analyzer more flexible. In other analyzers, the RL controlled how the measurement was performed as well as how it was displayed. Because the logarithmic amplifier in these analyzers had both range and resolution limitations, this behavior was necessary for optimum measurement accuracy. The logarithmic amplifier in this signal analyzer, however, is implemented digitally such that the range and resolution greatly exceed other instrument limitations. Because of this, the analyzer can make measurements largely independent of the setting of the RL without compromising accuracy. Because the RL becomes a display function, not a measurement function, a marker can read out results that are off-screen, either above or below, without any change in accuracy. The only exception to the independence of RL and the way in which the measurement is performed is in the input attenuation setting: When the input attenuation is set to auto, the rules for the determination of the input attenuation include dependence on the reference level. Because the input attenuation setting controls the tradeoff between large signal behaviors (third-order intermodulation, compression, and display scale fidelity) and small signal effects (noise), the measurement results can change with RL changes when the input attenuation is set to auto.
- Mixer power level (dBm) = total power at the input (dBm) – input attenuation (dB).
- Total power at the preamp (dBm) = total power at the input (dBm) – input attenuation (dB).
- The low noise path, when in use, does not substantially change the compression-to-noise dynamic range or the TOI-to-noise dynamic range because it mostly just reduces losses in the signal path in front of all significant noise, TOI and compression-affecting circuits. In other words, the compression threshold and the third-order intercept both decrease and to the same extent as that to which the DANL decreases.

Standard path: 1 dB gain compression (swept, standard, preselector on)

Large signals, even at frequencies not shown on the screen, can cause the analyzer to mismeasure on-screen signals because of two-tone gain compression. This specification tells how large an interfering signal must be in order to cause a 1 dB change in an on-screen signal. Mixer power level (dBm) = total power at the input (dBm) – input attenuation (dB).

Center frequency	Gain compression (nominal)		
	1a. PA Off	1b. LNA	1c. PA
20 to 40 MHz	+3 dBm	-16 dBm	-13 dBm
> 40 MHz to 3.6 GHz	+6 dBm	-16 dBm	-13 dBm
> 3.6 to 13.5 GHz	+5 dBm	-16 dBm	-27 dBm
> 13.5 to 26.5 GHz	+1 dBm	-20 dBm	-30 dBm
>26.5 to 50 GHz	0 dBm	-16 dBm	-32 dBm

IF prefilter bandwidth

This table applies without *Option FS1* or *FS2*, fast sweep. With *Option FS1* or *FS2*, which is a standard option in the UXa, this table applies for sweep rates that are manually chosen to be the same as or slower than "traditional" sweep rates, instead of the much faster sweep rates, such as autocoupled sweep rates, available with *FS1* or *FS2*. Sweep rate is defined to be span divided by sweep time. If the sweep rate is ≤ 1.1 times RBW-squared, the table applies. Otherwise, compute an "effective RBW" = Span / (SweepTime \times RBW). To determine the IF Prefilter Bandwidth, look up this effective RBW in the table instead of the actual RBW. For example, for RBW = 3 kHz, Span = 300 kHz, and Sweep time = 42 ms, we compute that Sweep Rate = 7.1 MHz/s, while RBW-squared is 9 MHz/s. So the Sweep Rate is < 1.1 times RBW-squared and the table applies; row 1 shows the IF Prefilter Bandwidth is nominally 8.9 kHz. If the sweep time is 1 ms, then the effective RBW computes to 100 kHz. This would result in an IF Prefilter Bandwidth from the third row, nominally 303 kHz.

Zero span or swept, RBW=	Sweep Type = FFT, FFT width =	-3 dB Bandwidth (nominal)
≤ 3.9 kHz	< 4.01 kHz	8.9 kHz
4.3 to 27 kHz	< 28.81 kHz	79 kHz
30 to 160 kHz	< 167.4 kHz	303 kHz
180 to 390 kHz	< 411.9 kHz	966 kHz
430 kHz to 10 MHz	< 7.99 MHz	10.9 MHz

Displayed Average Noise Level (DANL)

Input terminated, Sample or Average detector, Averaging type set to Log, IF Gain = High, 1 Hz Resolution Bandwidth, 0 dB input attenuation.

1a. Standard path (swept, preselector on, LNA off, PA off)					
Noise Floor Extension (Option NF2) improves DANL by 8 to 12 dB, for standard path.					
Frequency	Option		Full range	20 to 30 °C	Typical, unless otherwise stated
	508, 513 and 526	544 and 550			
2 to 10 Hz	x		N/A		–125 dBm (nominal)
2 to 10 Hz		x			–95 dBm (nominal)
> 10 to 100 Hz	x				–127 dBm (nominal)
> 10 to 100 Hz		x			–114 dBm (nominal)
> 100 Hz to 1 kHz	x				–129 dBm (nominal)
> 100 Hz to 1 kHz		x			–128 dBm (nominal)
> 1 to 9 kHz	x				–138 dBm (nominal)
> 1 to 9 kHz		x			–136 dBm (nominal)
> 9 to 100 kHz	x	x	–141 dBm	–141 dBm	–146 dBm
> 100 kHz to 1 MHz	x	x	–148 dBm	–150 dBm	–153 dBm
> 1 to 10 MHz	x	x	–152 dBm	–153 dBm	–156 dBm
> 10 MHz to 1.2 GHz	x	x	–151 dBm	–152 dBm	–155 dBm
> 1.2 to 2.1 GHz	x	x	–148 dBm	–150 dBm	–152 dBm
> 2.1 to 3.6 GHz	x	x	–147 dBm	–148 dBm	–150 dBm
> 3.6 to 6.6 GHz	x		–148 dBm	–150 dBm	–152 dBm
> 3.6 to 6.6 GHz		x	–148 dBm	–149 dBm	–151 dBm
> 6.6 to 8.4 GHz	x	x	–148 dBm	–150 dBm	–152 dBm
> 8.4 to 13.6 GHz	x	x	–146 dBm	–147 dBm	–151 dBm
> 13.6 to 17 GHz	x	x	–146 dBm	–147 dBm	–151 dBm
> 17 to 22.5 GHz	x	x	–144 dBm	–146 dBm	–149 dBm
> 22.5 to 26.5 GHz	x	x	–140 dBm	–142 dBm	–146 dBm
> 26.5 to 30 GHz		x	–139 dBm	–141 dBm	–145 dBm
> 30 to 34 GHz		x	–135 dBm	–138 dBm	–143 dBm
> 34 to 37 GHz		x	–131 dBm	–133 dBm	–139 dBm
> 37 to 40 GHz		x	–131 dBm	–133 dBm	–138 dBm
> 40 to 45 GHz		x	–127 dBm	–130 dBm	–136 dBm
> 45 to 50 GHz		x	–122 dBm	–126 dBm	–133 dBm

1b. Standard Path, LNA on (swept, preselector on, LNA on, PA off)

Noise Floor Extension (Option NF2) improves DANL by 10 to 11 dB, for standard path, LNA on

Frequency	Option		Full range	20 to 30 °C	Typical, unless otherwise stated
	508, 513 and 526	544 and 550			
< 20 MHz	x	x	N/A		Not permitted with LNA on
> 20 to 40 MHz	x				–164 dBm (nominal)
> 20 to 40 MHz		x			–160 dBm (nominal)
> 40 to 500 MHz	x		–165 dBm	–165 dBm	–167 dBm
> 40 to 500 MHz		x	–162 dBm	–163 dBm	–165 dBm
> 500 MHz to 2.5 GHz	x		–165 dBm	–165 dBm	–167 dBm
> 500 MHz to 2.5 GHz		x	–164 dBm	–165 dBm	–166 dBm
> 2.5 GHz to 3.6 GHz	x	x	–161 dBm	–163 dBm	–166 dBm
> 3.6 to 4.7 GHz	x		–163 dBm	–164 dBm	–167 dBm
> 3.6 to 4.7 GHz		x	–162 dBm	–163 dBm	–165 dBm
> 4.7 to 8.4 GHz	x		–162 dBm	–164 dBm	–166 dBm
> 4.7 to 8.4 GHz		x	–161 dBm	–163 dBm	–165 dBm
> 8.4 to 13.5 GHz	x	x	–161 dBm	–163 dBm	–165 dBm
> 13.5 to 17.1 GHz	x	x	–161 dBm	–163 dBm	–164 dBm
> 17.1 to 22.5 GHz	x		–159 dBm	–161 dBm	–163 dBm
> 17.1 to 22.5 GHz		x	–158 dBm	–161 dBm	–162 dBm
> 22.5 to 26.5 GHz	x	x	–155 dBm	–156 dBm	–159 dBm
> 26.5 to 27 GHz		x	–153 dBm	–155 dBm	–160 dBm
> 27 to 34.5 GHz		x	–148 dBm	–152 dBm	–156 dBm
> 34.5 to 42.5 GHz		x	–142 dBm	–146 dBm	–152 dBm
> 42.5 to 47 GHz		x	–138 dBm	–141 dBm	–148 dBm
> 47 to 50 GHz		x	–134 dBm	–138 dBm	–145 dBm

1c. Standard Path, PA on (swept, preselector on, LNA off, PA on)

Noise Floor Extension (Option NF2) improves DANL by 8 to 12 dB, for standard path, PA on.

Frequency	Option		Full range	20 to 30 °C	Typical, unless otherwise stated
	508, 513 and 526	544 and 550			
> 100 kHz to 200 kHz	x	x	N/A		–151 dBm (nominal)
> 200 kHz to 500 kHz	x	x			–162 dBm (nominal)
> 500 kHz to 1 MHz	x				–156 dBm (nominal)
> 500 kHz to 1 MHz		x			–161 dBm (nominal)
1 MHz to 2.1 GHz	x	x	–163 dBm	–163 dBm	–165 dBm
> 2.1 to 3.6 GHz	x	x	–160 dBm	–161 dBm	–163 dBm
> 3.6 to 8.4 GHz	x	x	–161 dBm	–162 dBm	–164 dBm
> 8.4 to 13.6 GHz	x	x	–161 dBm	–162 dBm	–164 dBm
> 13.6 to 17.1 GHz	x	x	–160 dBm	–162 dBm	–164 dBm
> 17.1 to 20.0 GHz	x	x	–159 dBm	–160 dBm	–163 dBm
> 20.0 to 26.5 GHz	x	x	–155 dBm	–156 dBm	–160 dBm
> 26.5 to 30 GHz		x	–155 dBm	–158 dBm	–160 dBm
> 30 to 34 GHz		x	–153 dBm	–157 dBm	–159 dBm
> 34 to 40 GHz		x	–150 dBm	–154 dBm	–156 dBm
> 40 to 45 GHz		x	–147 dBm	–150 dBm	–152 dBm
> 45 to 50 GHz		x	–144 dBm	–147 dBm	–151 dBm

1d. Standard path, LNA on, PA on (swept, preselector on, LNA on, PA on)

Noise Floor Extension (Option NF2) improves DANL by 6 to 11 dB, for standard path, LNA on, PA on.

Frequency	Option		Full range	20 to 30 °C	Typical, unless otherwise stated
	508, 513 and 526	544 and 550			
< 20 MHz	x	x	Not permitted with LNA on		
20 to 40 MHz	x		N/A		
> 20 to 40 MHz		x			
> 40 to 500 MHz	x		–165 dBm	–165 dBm	–167 dBm
> 40 to 500 MHz		x	–162 dBm	–163 dBm	–165 dBm
> 500 MHz to 2.5 GHz	x		–165 dBm	–165 dBm	–167 dBm
> 500 MHz to 2.5 GHz		x	–164 dBm	–165 dBm	–166 dBm
> 2.5 to 3.6 GHz	x	x	–161 dBm	–161 dBm	–165 dBm
> 3.6 to 8.4 GHz	x		–164 dBm	–165 dBm	–167 dBm
> 3.6 to 8.4 GHz		x	–162 dBm	–164 dBm	–167 dBm
> 8.4 to 13.5 GHz	x	x	–163 dBm	–164 dBm	–167 dBm
> 13.5 to 17.1 GHz	x	x	–161 dBm	–163 dBm	–166 dBm
> 17.1 to 23 GHz	x	x	–161 dBm	–163 dBm	–165 dBm
> 23 to 26.5 GHz	x	x	–158 dBm	–160 dBm	–163 dBm
> 26.5 to 36.5 GHz		x	–156 dBm	–159 dBm	–161 dBm
> 36.5 to 43.5 GHz		x	–152 dBm	–155 dBm	–158 dBm
> 43.5 to 47 GHz		x	–151 dBm	–153 dBm	–157 dBm
> 47 to 50 GHz		x	–150 dBm	–152 dBm	–156 dBm

2a. Low-Noise Path (low-noise path enabled, preselector on, LNA off, PA off)

Noise Floor Extension (Option NF2) improves DANL by 8 to 12 dB, for low-noise path.

Frequency	Option		Full range	20 to 30 °C	Typical, unless otherwise stated
	508, 513 and 526	544 and 550			
< 3.6 GHz	x	x	Not permitted with low noise path		
3.6 to 17.1 GHz	x		−151 dBm	−153 dBm	−155 dBm
3.6 to 17.1 GHz		x	−150 dBm	−152 dBm	−154 dBm
17.1 to 23 GHz	x	x	−149 dBm	−151 dBm	−153 dBm
23 to 26.5 GHz	x	x	−148 dBm	−150 dBm	−152 dBm
26.5 to 29 GHz		x	−146 dBm	−148 dBm	−151 dBm
29 to 34.5 GHz		x	−141 dBm	−143 dBm	−146 dBm
34.5 to 50 GHz		x	−137 dBm	−139 dBm	−144 dBm

2b. Low-noise path DANL (low-noise path enabled, preselector on, LNA on, PA off)

Frequency	2b. LNP path, LNA on (nominal)
< 3.6 GHz	Not permitted with low noise path
3.6 to 17.1 GHz	-165 dBm
> 17.1 to 23 GHz	-164 dBm
> 23 to 26.5 GHz	-162 dBm
> 26.5 to 29 GHz	-162 dBm
> 29 to 34.5 GHz	-160 dBm
> 34.5 to 50 GHz	-154 dBm

3a, 3b. Microwave preselector bypass (MPB) path DANL (MPB path enabled)		
Frequency	3a. MPB path (nominal)	3b. MPB, LNA on (nominal)
3.6 to 8.4 GHz	-154 dBm	-163 dBm
> 8.4 to 17.1 GHz	-151 dBm	-162 dBm
> 17.1 to 22.5 GHz	-150 dBm	-161 dBm
> 22.5 to 26.5 GHz	-146 dBm	-159 dBm
> 26.5 to 30 GHz	-145 dBm	-159 dBm
> 30 to 34 GHz	-142 dBm	-158 dBm
> 34 to 40 GHz	-137 dBm	-154 dBm
> 40 to 45 GHz	-134 dBm	-153 dBm
> 45 to 50 GHz	-130 dBm	-150 dBm

If using microwave preselector path (MPB) use path 3b for digital demodulation.

4a. Full bypass (FBP) path DANL (low-noise path enabled, preselector bypass on, LNA off, PA off)			
Frequency	Full range	20 to 30 °C	Typical, unless otherwise stated
3.6 to 8.4 GHz	-154 dBm	-156 dBm	-158 dBm
> 8.4 to 13.6 GHz	-154 dBm	-155 dBm	-158 dBm
> 13.6 to 17.1 GHz	-154 dBm	-155 dBm	-158 dBm
> 17.1 to 22 GHz	-152 dBm	-153 dBm	-157 dBm
> 22 to 26.5 GHz	-152 dBm	-153 dBm	-156 dBm
> 26.5 to 29 GHz	-151 dBm	-152 dBm	-157 dBm
> 29 to 34.5 GHz	-150 dBm	-152 dBm	-156 dBm
> 34.5 to 45 GHz	-147 dBm	-149 dBm	-152 dBm
> 45 to 50 GHz	-145 dBm	-147 dBm	-151 dBm

4b. Full bypass (FBP) path DANL (low-noise path enabled, preselector bypass on, LNA on) (nominal)	
Frequency	4b. FBP, LNA on
3.6 to 8.4 GHz	-163 dBm
> 8.4 to 13.6 GHz	-163 dBm
> 13.6 to 17.1 GHz	-162 dBm
> 17.1 to 22 GHz	-161 dBm
> 22 to 26.5 GHz	-160 dBm
> 26.5 to 29 GHz	-160 dBm
> 29 to 34.5 GHz	-159 dBm
> 34.5 to 45 GHz	-154 dBm
> 45 to 50 GHz	-153 dBm

Residuals, Images, and Spurious Responses

Residual responses (input terminated, 0 dB attenuation)				
200 kHz to 8.4 GHz (swept)		-100 dBm		
Zero span or FFT or other frequencies		-100 dBm (nominal)		
Image responses (standard path, LNA off, PA off)				
Mixer level	Tuned frequency (f)	Excitation frequency	Full range	Typical
-10 dBm	10 MHz to 26.5 GHz	f+45 MHz	-80 dBc	-105 dBc
	10 MHz to 3.6 GHz	f+10,245 MHz	-80 dBc	-106 dBc
	10 MHz to 3.6 GHz	f+645 MHz	-80 dBc	-101 dBc
	> 3.6 to 13.6 GHz	f+645 MHz	-78 dBc	-87 dBc
	> 13.6 to 17.1 GHz	f+645 MHz	-74 dBc	-84 dBc
	> 17.1 to 22 GHz	f+645 MHz	-70 dBc	-82 dBc
	> 22 to 26.5 GHz	f+645 MHz	-68 dBc	-75 dBc
-30 dBm	26.5 to 50 GHz	f+45 MHz		-90 dBc (nominal)
	26.5 to 34.5 GHz	f+645 MHz	-70 dBc	-94 dBc
	34.4 to 42 GHz	f+645 MHz	-59 dBc	-76 dBc
	42 to 50 GHz	f+645 MHz		-75 dBc (nominal)
Other spurious responses (input-related, standard path, LNA off, PA off)				
N is the LO multiplication factor. Refer to earlier table for the N value versus frequency ranges. Performance is nominally the same, with PA on, and in low-noise path (LNP).				
		Mixer level	Response	
First RF order (f ≥ 10 MHz from carrier)				
Carrier frequency ≤ 26.5 GHz	-10 dBm	-80 dBc + 20*log(N) including IF feedthrough, LO harmonic mixing responses		
Carrier frequency > 26.5 GHz	-30 dBm	-90 dBc (nominal)		
Higher RF order (f ≥ 10 MHz from carrier)				
Carrier frequency ≤ 26.5 GHz	-40 dBm	-80 dBc + 20*log(N) including higher order mixer responses		
Carrier frequency > 26.5 GHz	-30 dBm	-90 dBc (nominal)		
LO-related spurious responses				
200 Hz ≤ f < 10 MHz from carrier	-10 dBm	-68 dBc + 20*log(N) -72 dBc + 20*log(N) (typical)		
45 Hz ≤ f < 200 MHz from carrier		-73 dBc + 20*log(N) (nominal)		
Nominally -40 dBc under large magnetic (0.38 Gauss rms) or vibrational (0.21 g rms) environmental stimuli.				

Second-Harmonic Intercept (SHI)

1a. Standard path (swept, preselector on, LNA off, PA off)			
Frequency of the fundamental	Mixer level	Distortion	SHI
10 to 500 MHz	-15 dBm	-65 dBc	+50 dBm
> 500 MHz to 1.8 GHz	-15 dBm	-60 dBc	+45 dBm
> 1.8 to 3 GHz	-15 dBm	-77 dBc	+62 dBm
> 3 to 4.5 GHz	-15 dBm	-76 dBc	+61 dBm
> 4.5 to 6.5 GHz	-15 dBm	-77 dBc	+62 dBm
> 6.5 to 10 GHz	-15 dBm	-80 dBc	+65 dBm
> 10 to 13.25 GHz	-15 dBm	-80 dBc	+65 dBm
> 13.25 to 25 GHz	-15 dBm	-68 dBc	+53 dBm

1b. Standard path (swept, preselector on, LNA on, PA off) Preamp Level = Input Level – Input Attenuation			
Frequency of the Fundamental	Preamp level	Distortion (nominal)	SHI (nominal)
15 to 40 MHz	-45 dBm	-65 dBc	+20 dBm
> 40 MHz to 1 GHz	-45 dBm	-63 dBc	+18 dBm
> 1 to 1.8 GHz	-45 dBm	-61 dBc	+16 dBm
> 1.8 to 13.25 GHz	-45 dBm	-63 dBc	+18 dBm

1c. Standard path (swept, preselector on, LNA off, PA on) Preamp Level = Input Level – Input Attenuation			
Frequency of the Fundamental	Preamp level	Distortion (nominal)	SHI (nominal)
10 to 400 MHz	-45 dBm	-78 dBc	+33 dBm
> 400 MHz to 1.8 GHz	-45 dBm	-73 dBc	+28 dBm
> 1.8 to 4 GHz	-50 dBm	-55 dBc	+5 dBm
> 4 to 13.25 GHz	-50 dBm	-60 dBc	+10 dBm
> 13.25 to 25 GHz	-50 dBm	-50 dBc	0 dBm

1d. Standard path (swept, preselector on, LNA on, PA on) Preamp Level = Input Level – Input Attenuation			
Frequency of the Fundamental	Preamp Level	Distortion (nominal)	SHI (nominal)
1.8 to 4 GHz	-50 dBm	-44 dBc	-6 dBm
>4 to 13.25 GHz	-50 dBm	-47 dBc	-3 dBm

2a. Low-noise path: SHI (swept, Low-noise path enable, preselector on, LNA off, PA off)			
Frequency of the Fundamental	Mixer Level	Distortion	SHI
1.8 to 2.5 GHz	-15 dBm	-95 dBc	+80 dBm
> 2.5 to 10 GHz	-15 dBm	-101 dBc	+86 dBm
> 10 to 13.25 GHz	-15 dBm	-101 dBc	+86 dBm
> 13.25 to 25 GHz	-15 dBm	-92 dBc	+77 dBm

Third-Order Intercept (TOI)

1a. Standard path (swept, preselector on, LNA off, PA off)

Two -16 dBm (10 MHz to 26.5 GHz) or -20 dBm (26.5 GHz to 50 GHz) tones at input mixer with tone separation ≥ 100 kHz

Frequency	Full Range	20 to 30° C	Typical, unless otherwise stated
10 to 200 MHz	+9 dBm	+12 dBm	+18 dBm
> 200 to 600 MHz	+16 dBm	+17 dBm	+20 dBm
> 600 MHz to 2.0 GHz	+18.5 dBm	+19.5 dBm	+22 dBm
> 2.0 to 3.6 GHz	+18.5 dBm	+19.5 dBm	+23 dBm
> 3.6 to 7.1 GHz	+15 dBm	+16 dBm	+18 dBm
> 7.1 to 10 GHz	+14.5 dBm	+15 dBm	+18 dBm
> 10 to 13.6 GHz	+17.5 dBm	+18.5 dBm	+22 dBm
> 13.6 to 19 GHz	+7 dBm	+9.5 dBm	+12 dBm
> 19 to 23 GHz	+12 dBm	+14 dBm	+16 dBm
> 23 to 26.5 GHz	+13 dBm	+14.5 dBm	+18 dBm
> 26.5 GHz to 34.5 GHz	+11 dBm	+13 dBm	+17 dBm
> 34.5 to 50 GHz	+7 dBm	+9 dBm	+14 dBm

1b. Standard Path (swept, preselector on, LNA on, PA off)

Two -34 dBm tones at preamp level with tone separation ≥ 100 kHz

Frequency	TOI (nominal)
30 to 200 MHz	0 dBm
> 200 to 600 MHz	+1 dBm
> 600 MHz to 3 GHz	+2.5 dBm
> 3 to 3.6 GHz	+5 dBm
> 3.6 to 4 GHz	-1 dBm
> 4 to 8 GHz	0 dBm
> 8 to 13.6 GHz	+2 dBm
> 13.6 to 19 GHz	-5 dBm
> 19 to 26.5 GHz	0 dBm

1c. Standard path (swept, preselector on, LNA off, PA on)

Two -34 dBm (10 MHz to 3.6 GHz) or -50 dBm (3.6 GHz to 26.5 GHz) tones at LNA input with tone separation ≥ 100 kHz

Frequency	TOI (nominal)
10 to 200 MHz	+2 dBm
> 200 to 400 MHz	+3 dBm
> 400 MHz to 1 GHz	+4 dBm
> 1 to 3.6 GHz	+5 dBm
> 3.6 to 4 GHz	-14 dBm
> 4 to 8 GHz	-13 dBm
> 8 to 13.6 GHz	-8 dBm
> 13.6 to 19 GHz	-17 dBm
> 19 to 26.5 GHz	-12 dBm

1d. Standard path (swept, preselector on, LNA on, PA on)

Two –50 dBm tones at preamp level with tone separation ≥ 100 kHz

Frequency	TOI (nominal)
3.6 to 4 GHz	–22 dBm
> 4 to 8 GHz	–20 dBm
> 8 to 13.6 GHz	–16 dBm
> 13.6 to 19 GHz	–24 dBm
> 19 to 26.5 GHz	–21 dBm


2a. Low-noise path (swept, Low-noise path enable, preselector on, LNA off, PA off)

Two –16 dBm (3.6 GHz to 26.5 GHz) or –20 dBm (26.5 GHz to 50 GHz) tones at input mixer with tone separation ≥ 100 kHz

Frequency	Full Range	20 °C to 30 °C	Typical
3.6 to 7.6 GHz	+9 dBm	+10 dBm	+13 dBm
> 7.6 to 10 GHz	+10 dBm	+11 dBm	+14 dBm
> 10 to 13.6 GHz	+11 dBm	+12 dBm	+15 dBm
> 13.6 to 19 GHz	+2 dBm	+4 dBm	+7 dBm
> 19 to 23 GHz	+6 dBm	+7 dBm	+10 dBm
> 23 to 26.5 GHz	+6 dBm	+8 dBm	+10 dBm
> 26.5 GHz to 34.5 GHz	+3 dBm	+6 dBm	+8 dBm
> 34.5 to 50 GHz	+1.5 dBm	+4 dBm	+7 dBm

Phase Noise (SSB)

Phase Noise	Offset	Full Range	20 to 30 °C	Typical, unless otherwise stated
Noise sidebands (CF = 1 GHz)	10 Hz Wide Ref Loop BW	The factory test line limit is consistent with a warranted specification of -90 dBc/Hz		-93 dBc/Hz
	10 Hz Narrow Ref Loop BW			-88 dBc/Hz (nominal)
	100 Hz	-107 dBc/Hz	-107 dBc/Hz	-112 dBc/Hz
	1 kHz	-124 dBc/Hz	-125 dBc/Hz	-129 dBc/Hz
	10 kHz	-132 dBc/Hz	-134 dBc/Hz	-136 dBc/Hz
	100 kHz	-138 dBc/Hz	-139 dBc/Hz	-141 dBc/Hz
	1 MHz	-144 dBc/Hz	-145 dBc/Hz	-146 dBc/Hz
	10 MHz	-154 dBc/Hz	-154 dBc/Hz	-157 dBc/Hz

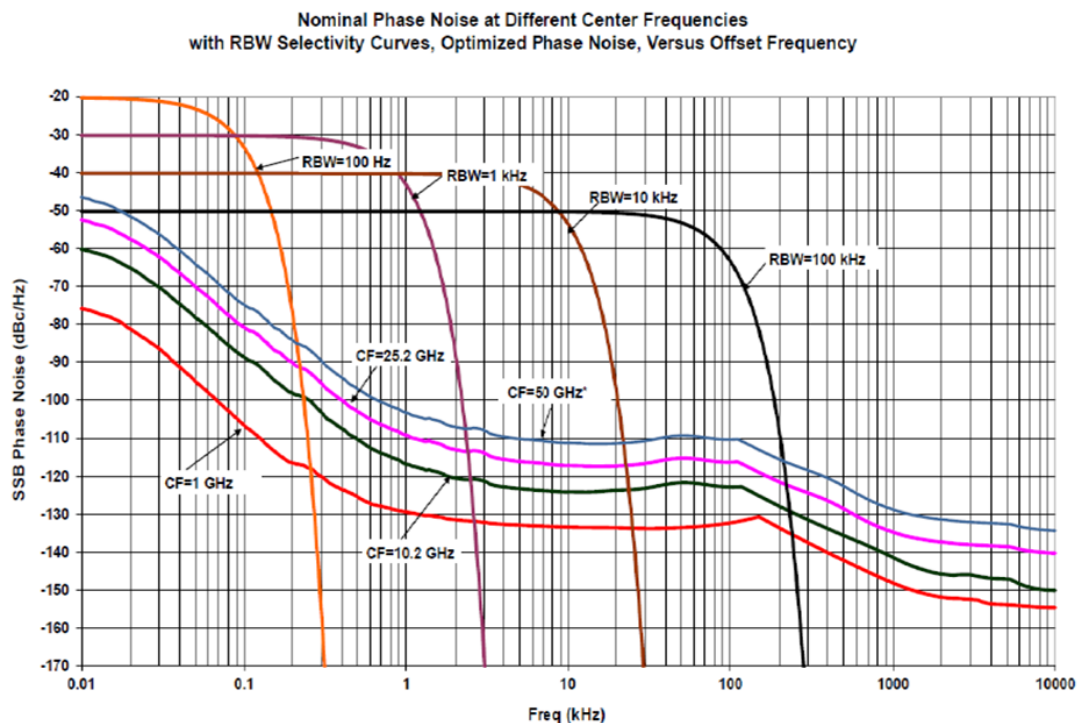

* Unlike other curves, which are measured results from the measurement of excellent sources, the CF = 50 GHz curve is the predicted, not observed, phase noise, computed from the 25.2 GHz observation. See the footnotes in the Frequency Stability section for the details of phase noise performance versus center frequency.

Figure 3: Nominal PXA phase noise at various center frequencies. RBW curves added to show impact of analyzer phase noise in resolving two closely spaced signals for various RBW filter choices

IQ Analyzer

All specifications based on preselector by-passed (RF Path either Microwave Preselector Bypass or Full Bypass) (except <3.6 GHz), unless otherwise noted. IF Paths at 10, 25, 40, and 255 MHz are enabled by any of R10, R15, or R20. Each bandwidth option includes and enables all others with lesser bandwidth, e.g. instruments with R20 also have R15 and R10 licenses, plus B2X, B40, and B25 paths.

10 MHz Analysis Bandwidth (Standard)

Specifications on this bandwidth apply with center frequencies of 10 MHz and higher. All specifications apply under the following settings unless otherwise specified: preselector bypassed, PA off, LNA off, IF gain = Auto, IF gain offset = 0 dB.

10 MHz analysis bandwidth (standard)						
Analysis bandwidth range	10 Hz to 10 MHz					
Tuning range	2 Hz to 50 GHz		In practice, low end of tuning range limited to < (½*BW), by image folding and LO feedthrough. Over-range tuning to 50.5 GHz allowed, but without corrections, performance not specified			
IF frequency	5122.5 MHz (1 st IF, center frequency ≤ 3.6 GHz) 322.5 MHz (Final IF)					
ADC sample rate	100 MSa/sec					
ADC resolution	16 bits					
Final data format	I & Q pairs, 32 bits each, 64 bits/Sa					
IQ-pair sample rate	1.25*BW					
Capture memory	2 GB					
IQ Analyzer	32,000,001 sample pairs					
Length (IQ sample pairs)	536.8 MSa (2 ²⁹ Sa) with 32-bit data packing					
	268.4 MSa (2 ²⁸ Sa) with 64-bit data packing					
Maximum capture time (time record length)	35.8 sec at full 10 MHz BW with 32-bit data packing		Capture time increases linearly with decrease in bandwidth			
IF frequency response						
Center frequency	Span (MHz)	Preselector	Amplitude Max Error	Amplitude Midwidth Error (95%)	Slope (dB/MHz) (95%)	Amplitude RMS (nominal)
0.02 to 3.6 GHz	≤ 10	NA	± 0.20 dB	± 0.12 dB	± 0.10	0.02 dB
> 3.6 to 26.5 GHz	≤ 10	Off	± 0.25 dB	± 0.12 dB	± 0.10	0.02 dB
> 26.5 to 34.4 GHz	≤ 10	Off	± 0.30 dB	± 0.12 dB	± 0.10	0.024 dB
> 34.4 to 50 GHz	≤ 10	Off	± 0.35 dB	± 0.12 dB	± 0.10	0.024 dB
IF phase linearity						
Center Frequency		Span (MHz)			Preselector	RMS (nominal)
≥ 0.02 GHz, ≤ 3.6 GHz		≤ 10 MHz			N/A	0.040°
3.6 to 50 GHz		≤ 10 MHz			Off	0.070°

25 MHz Analysis Bandwidth (Option B25)

Specifications on this bandwidth apply with center frequencies of 15 MHz and higher. All specifications apply under the following settings unless otherwise specified: preselector bypassed, PA off, LNA off, IFgain = Auto, IF gain offset = 0 dB.

25 MHz Analysis Bandwidth (option B25)				
Analysis bandwidth range	10 Hz to 25 MHz			
Tuning range	2 Hz to 50 GHz		In practice, low end of tuning range limited to < (½*BW), by image folding and LO feedthrough. Over-range tuning to 50.5 GHz allowed, but without corrections, performance not specified	
IF frequency	5122.5 MHz (1 st IF, center frequency ≤ 3.6 GHz) 322.5 MHz (Final IF)			
ADC sample rate	100 MSa/sec			
ADC resolution	16 bits			
Final data format	I & Q pairs, 32 bits each, 64 bits/Sa			
IQ-pair sample rate	1.25*IFBW			
Capture memory	2 GB			
IQ Analyzer	32,000,001 sample pairs			
Length (IQ sample pairs)	536.8 MSa (2 ²⁹ Sa) with 32-bit data packing			
	268.4 MSa (2 ²⁸ Sa) with 64-bit data packing			
Maximum capture time (time record length)	11.9 sec at full 25 MHz BW with 32-bit data packing		Capture time increases linearly with decrease in bandwidth	
IF frequency response				
Center frequency	Span (MHz)	Preselector	Amplitude Max Error	Amplitude RMS (nominal)
0.02 to 3.6 GHz	10 to ≤ 25	NA	± 0.30 dB	0.05 dB
> 3.6 to 26.5 GHz	10 to ≤ 25	Off	± 0.40 dB	0.04 dB
> 26.5 to 50 GHz	10 to ≤ 25	Off	± 0.60 dB	0.04 dB
IF phase linearity				
Center Frequency	Span (MHz)		Preselector	RMS (nominal)
≥ 0.02 GHz, ≤ 3.6 GHz	≤ 25 MHz		N/A	0.12°
3.6 to 50 GHz	≤ 25 MHz		Off	0.28°
Full scale (ADC clipping); preselector bypassed, LNA off, PA off (nominal)				
Full scale (ADC clipping level) is a rough estimate of the signal level at which ADC overload occurs. Actual clipping levels vary significantly; this is only a guide. Mixer level is RF input level less attenuation setting.				
Center frequency	Option		Mixer level for IF gain = low	Mixer level for IF gain = high
	508, 513 and 526	544 and 550		
2 Hz to 26.5 GHz	x		– 8 dBm	–18 dBm
> 2 Hz to 50 GHz		x	– 8 dBm	–18 dBm
Effect of signal frequency ≠ CF			Up to ± 1 dB nominal	

40 MHz Analysis Bandwidth (Option B40)

Specifications on this bandwidth apply with center frequencies of 65 MHz and higher. All specifications apply under the following settings unless otherwise specified: preselector bypassed, PA off, LNA off, IF gain = Auto, IF gain offset = 0 dB.

40 MHz analysis bandwidth (option B40)				
Analysis bandwidth range	10 Hz to 40 MHz		In practice, low end of tuning range limited to < (½*BW), by image folding and LO feedthrough. Over-range tuning to 50.5 GHz allowed, but without corrections, performance not specified.	
Tuning range	2 Hz to 50 GHz			
IF frequency	5050 MHz (1 st IF, center frequency ≤ 3.6 GHz) 250 MHz (Final IF)			
ADC sample rate	200 MSa/sec			
ADC resolution	12 bits			
Final data format	I & Q pairs, 32 bits each, 64 bits/Sa			
IQ-pair sample rate	1.25*IFBW			
Capture memory	2 GB			
IQ Analyzer	32,000,001 sample pairs			
Length (IQ sample pairs)	536.8 MSa (2 ²⁹ Sa) with 32-bit data packing			
	268.4 MSa (2 ²⁸ Sa) with 64-bit data packing			
Maximum capture time (time record length)	10.73 sec at full 40 MHz BW with 32-bit data packing		Capture time increases linearly with decrease in bandwidth	
	10.73 sec at full 40 MHz BW with 64-bit data packing			
IF frequency response				
Center frequency	Span(MHz)	Preselector	Amplitude Max Error	Amplitude RMS(nominal)
0.02 to 3.6 GHz	≤ 40	NA	± 0.40 dB	0.07 dB
> 3.6 to 8.4 GHz	≤ 40	Off	± 0.60 dB	0.05 dB
> 8.4 to 26.5 GHz	≤ 40	Off	± 0.70 dB	0.05 dB
> 26.5 to 34.4 GHz	≤ 40	Off	± 0.80 dB	0.10 dB
> 34.4 to 50 GHz	≤ 40	Off	± 1.00 dB	0.10 dB
IF phase linearity				
Center Frequency	Span (MHz)	Preselector	RMS (nominal)	
≥ 0.02 GHz, ≤ 3.6 GHz	≤ 40 MHz	N/A	0.12°	
3.6 to 50 GHz	≤ 40 MHz	Off	0.32°	
IF dynamic range (IF gain = low) (nominal)				
SFDR (spurious-free dynamic range) (ADC related spurious)	-77 dBc		Signal at -12 dBFS, anywhere in full IF width	
IF residual responses (relative to full scale, input terminated, IF gain = low) (nominal)				
65 MHz to 34.5 GHz	-110 dBFS			
> 34.5 to 50 GHz	-105 dBFS			
Full scale (ADC clipping); preselector bypassed, LNA off, PA off (nominal)				
Full scale (ADC clipping level) is a rough estimate of the signal level at which ADC overload occurs. Actual clipping levels vary significantly; this is only a guide. Mixer level is RF input level less attenuation setting.				
Center frequency	Option		Mixer level for IF gain = low	Mixer level for IF gain = high
	508, 513 and 526	544 and 550		
2 Hz to 26.5 GHz	x		-8 dBm	-18 dBm
> 2 Hz to 34.5 GHz		x	-8 dBm	-18 dBm
> 34.5 to 50 GHz		x	-8 dBm	-12 dBm
Effect of signal frequency ≠ CF			Up to ±1 dB nominal	

Signal to noise ratio (ratio of clipping level to noise level, log averaged, 1 Hz RBW, IF gain = Low) (nominal)						
Center frequency						
≤ 3.6 GHz			143 dB			
> 17.1 to 26.5 GHz			141 dB			
> 26.5 to 50 GHz			135 dB			
TOI (3rd-order intermodulation distortion in the IF, 2 tones of equal level @ -19 dBFS, 10 MHz tone separation) (nominal)						
Center frequency						
≤ 3.6 GHz			-83 dBc			
> 3.6 to 13.6			-83 dBc			
> 13.6 to 26.5 GHz			-83 dBc			
> 26.5 GHz to 50 GHz			-79 dBc			
Noise density in IF (characterized at center of RF band and center of IF, 0 dB attenuation)						
The noise level in the IF will change for frequencies away from the center of the IF. The IF part of the total noise is nominally ± 1.2 dB worse at the worst frequency within the IF bandwidth.						
Center Frequency	3a. MPB		3b. LNA on		4a. FBP	
	IF gain = low	IF gain = high	IF gain = low	IF gain = high	IF gain = low	IF gain = high
65 MHz to 3.6 GHz	-145 dBm/Hz	-145 dBm/Hz	-158 dBm/Hz	-158 dBm/Hz	N/A	N/A
> 3.6 to 8.4 GHz	-150 dBm/Hz	-152 dBm/Hz	-160 dBm/Hz	-160 dBm/Hz	-152 dBm/Hz	-156 dBm/Hz
> 8.4 to 13.6 GHz	-149 dBm/Hz	-150 dBm/Hz	-158 dBm/Hz	-158 dBm/Hz	-152 dBm/Hz	-156 dBm/Hz
> 13.6 to 17.1 GHz	-149 dBm/Hz	-151 dBm/Hz	-158 dBm/Hz	-158 dBm/Hz	-152 dBm/Hz	-156 dBm/Hz
> 17.1 to 26.5 GHz	-146 dBm/Hz	-146 dBm/Hz	-155 dBm/Hz	-155 dBm/Hz	-152 dBm/Hz	-154 dBm/Hz
> 26.5 to 34.5 GHz	-142 dBm/Hz	-142 dBm/Hz	-152 dBm/Hz	-152 dBm/Hz	-150 dBm/Hz	-150 dBm/Hz
> 34.5 to 50 GHz	-132 dBm/Hz	-132 dBm/Hz	-143 dBm/Hz	-143 dBm/Hz	-145 dBm/Hz	-145 dBm/Hz
Spurious responses (preselector enabled for frequencies > 3.6 GHz) (nominal)						
Residual responses (input terminated, 0 dB attenuation, IF gain = low)						
Center Frequency						
< 3.6 GHz			-100 dBm			
3.6 to 40 GHz			-105 dBm			
> 40 GHz			-95 dBm			
Image responses						
Tuned frequency (f)			Excitation frequency			
10 MHz to 3.6 GHz			f + 2 * 1 st IF MHz f + 2 * Final IF MHz			
> 3.6 to 50.0 GHz			f + 2 * Final IF MHz			

255 MHz Analysis Bandwidth (Option B2X)

Specifications on this bandwidth apply with center frequencies of 400 MHz and higher. All specifications apply under the following settings unless otherwise specified: preselector bypassed, PA off, LNA off, IF gain = Auto, IF gain offset = 0 dB.

255 MHz analysis bandwidth (option B2X)							
Analysis bandwidth range	10 Hz to 255 MHz						
Tuning range	2 Hz to 50 GHz			In practice, low end of tuning range limited to $< (\frac{1}{2} \times BW)$, by image folding and LO feedthrough. Over-range tuning to 50.5 GHz allowed, but without corrections, performance not specified.			
IF frequency	5490 MHz (1 st IF, center frequency ≤ 3.6 GHz) 690 MHz (Final IF)						
ADC sample rate	4.8 GSa/sec						
ADC resolution	14 bits						
Final data format	I & Q pairs, 32 bits each, 64 bits/Sa						
IQ-pair sample rate	1.25*IFBW						
Capture memory	16 GB						
IQ Analyzer	32,000,001 sample pairs						
Length (IQ sample pairs)	1073 MSa (2 ²⁹ Sa) with 32-bit data packing						
Maximum capture time (time record length)	14.3 sec at full 255 MHz BW			Capture time increases linearly with decrease in bandwidth			
IF frequency response (span ≤ 255 MHz), microwave preselector bypass path (MPB)							
Center frequency	3a. MPB (10 dB attenuation)			3b. LNA on (0 dB attenuation)		3c. PA on (0 dB attenuation)	
	Full range	20 to 30 °C	RMS (nominal)	Nominal	RMS (nominal)	Nominal	RMS (nominal)
600 MHz to 3.3 GHz	± 1.05 dB	± 0.90 dB	0.06 dB	± 0.15 dB	0.06 dB	± 0.30 dB	0.20 dB
> 3.3 to 8.4 GHz	± 1.00 dB	± 0.80 dB	0.06 dB	± 0.15 dB	0.10 dB	± 0.20 dB	0.15 dB
> 8.4 to 26.5 GHz	± 1.15 dB	± 1.05 dB	0.10 dB	± 0.40 dB	0.20 dB	± 0.35 dB	0.20 dB
> 26.5 to 34.4 GHz	± 1.70 dB	± 1.55 dB	0.20 dB	± 0.45 dB	0.20 dB	± 0.55 dB	0.30 dB
> 34.4 to 48.55 GHz	± 2.70 dB	± 2.45 dB	0.20 dB	± 0.60 dB	0.30 dB	± 0.90 dB	0.50 dB
> 48.55 to 50 GHz	± 0.65 dB (nominal)		0.30 dB	± 0.75 dB	0.30 dB	± 1.10 dB	0.50 dB
IF frequency response (span ≤ 255 MHz) full bypass path (FBP)							
Center frequency	4a. FBP (10 dB attenuation)			4b. LNA on (0 dB attenuation)			
	Full range	20 to 30 °C	RMS (nominal)	Nominal	RMS (nominal)	Nominal	RMS (nominal)
> 3.3 to 8.4 GHz	± 0.90 dB	± 0.80 dB	0.07 dB			± 0.20 dB	0.15 dB
> 8.4 to 26.5 GHz	± 1.15 dB	± 1.05 dB	0.10 dB			± 0.35 dB	0.20 dB
> 26.5 to 34.4 GHz	± 1.60 dB	± 1.50 dB	0.15 dB			± 0.35 dB	0.20 dB
> 34.4 to 48.55 GHz	± 2.80 dB	± 2.45 dB	0.20 dB			± 0.65 dB	0.30 dB
> 48.55 to 50 GHz	± 0.80 dB (nominal)		0.30 dB			± 0.95 dB	0.30 dB
IF phase linearity							
Center Frequency	Span (MHz)		Preselector		RMS (nominal)		
≥ 0.02 GHz, ≤ 3.3 GHz	≤ 255		N/A		4°		
3.3 to 26.5 GHz	≤ 255		Off		0.80°		
26.5 to 50 GHz	≤ 255		Off		1.50°		
IF dynamic range (IF gain = high) (nominal)							
SFDR (spurious-free dynamic range) (ADC related spurious)			-78dBc		Signal at -27 dBFS, anywhere in full IF width		
IF residual responses (relative to full scale, input terminated, IF gain = low) (nominal)							
65 MHz to 50 GHz			-100 dBFS				

Full scale (ADC clipping); preselector bypassed, LNA off, PA off (nominal)

Full scale (ADC clipping level) is a rough estimate of the signal level at which ADC overload occurs. Actual clipping levels vary significantly; this is only a guide. Mixer level is RF input level less attenuation setting.

Center frequency	Option		Mixer level for IF gain = low	Mixer level for IF gain = high
	508, 513 and 526	544 and 550		
< 3.3 GHz	x	x	-15 dBm	-15 dBm
> 3.3 to 13.3 GHz	x		-8 dBm	-17 dBm
> 3.3 to 13.3 GHz		x	-10 dBm	-19 dBm
> 13.3 to 26.5 GHz	x		-10 dBm	-17 dBm
> 13.3 to 26.5 GHz		x	-12 dBm	-19 dBm
> 26.5 to 50 GHz		x	-11 dBm	-14 dBm
Effect of signal frequency \neq CF			Up to ± 2.5 dB nominal	

Signal to noise ratio
(ratio of clipping level to noise level, log averaged, 1 Hz RBW, IF gain = Low) (nominal)

Center frequency	
≤ 3.6 GHz	145 dB
> 17.1 to 26.5 GHz	140 dB
> 26.5 to 50 GHz	137 dB

TOI
(3rd-order intermodulation distortion in the IF, 2 tones of equal level @ -25 dBFS (≤ 26.5 GHz) or -23 dBFS (>26.5 GHz to 50 GHz), 1 MHz tone separation) (nominal)

Center frequency	
< 3.3 GHz	-75 dBc
> 3.3 to 20 GHz	-76 dBc
> 20 to 26.5 GHz	-76 dBc
> 26.5 GHz to 50 GHz	-76 dBc

Noise density in IF (characterized at center of RF band and center of IF, 0 dB attenuation)

The noise level in the IF will change for frequencies away from the center of the IF. The IF part of the total noise is nominally ± 1.0 dB worse at the worst frequency within the IF bandwidth.

Center Frequency	3a. MPB		4a. FBP		3b. LNA on	
	IF gain = low	IF gain = high	IF gain = low	IF gain = high	IF gain = low	IF gain = high
400 MHz to 3.3 GHz	-146 dBm/Hz	-145 dBm/Hz	N/A	N/A	-160 dBm/Hz	-160 dBm/Hz
> 3.3 to 8.6 GHz	-151 dBm/Hz	-153 dBm/Hz	-155 dBm/Hz	-158 dBm/Hz	-160 dBm/Hz	-160 dBm/Hz
> 8.6 to 13.3 GHz	-151 dBm/Hz	-151 dBm/Hz	-155 dBm/Hz	-157 dBm/Hz	-159 dBm/Hz	-159 dBm/Hz
> 13.3 to 26.5 GHz	-146 dBm/Hz	-146 dBm/Hz	-152 dBm/Hz	-153 dBm/Hz	-154 dBm/Hz	-154 dBm/Hz
> 26.5 to 34 GHz	-143 dBm/Hz	-143 dBm/Hz	-152 dBm/Hz	-153 dBm/Hz	-152 dBm/Hz	-152 dBm/Hz
> 34 to 50 GHz	-133 dBm/Hz	-133 dBm/Hz	-145 dBm/Hz	-147 dBm/Hz	-144 dBm/Hz	-144 dBm/Hz

Spurious responses (preselector enabled for frequencies > 3.6 GHz)

Residual responses (input terminated, 0 dB attenuation)

Center frequency	
65 MHz to 50 GHz	-100 dBm (nominal)

Image responses

Tuned frequency (f)	Excitation frequency
10 MHz to 3.3 GHz	$f + 2 * 1\text{st IF MHz}$
	$f + 2 * \text{Final IF MHz}$
> 3.3 to 50.0 GHz	$f + 2 * \text{Final IF MHz}$

Amplitude accuracy, absolute, microwave preselector bypass path (MPB)				
	3a. MPB (10 dB attenuation)		3b. LNA on (0 dB attenuation)	3c. PA on (0 dB attenuation)
Frequency	Full range	20 to 30 °C	Nominal	Nominal
10 to 600 MHz	± 1.8 dB	± 1.5 dB	± 0.8 dB	± 0.7 dB
600 MHz to 3.3 GHz	± 1.5 dB	± 1.2 dB	± 0.5 dB	± 0.5 dB
> 3.3 to 8.6 GHz	± 1.2 dB	± 1.0 dB	± 0.3 dB	± 0.3 dB
> 8.6 to 13.3 GHz	± 2.0 dB	± 1.5 dB	± 0.4 dB	± 0.3 dB
> 13.3 to 17.1 GHz	± 2.0 dB	± 1.5 dB	± 0.5 dB	± 0.5 dB
> 17.1 to 26.5 GHz	± 2.7 dB	± 2.2 dB	± 0.6 dB	± 0.6 dB
> 26.5 to 34.5 GHz	± 3.2 dB	± 2.5 dB	± 0.9 dB	± 1.0 dB
> 34.5 to 36.5 GHz	± 5.5 dB	± 3.0 dB	± 1.3 dB	± 1.3 dB
> 36.5 to 45.0 GHz	± 4.5 dB	± 3.0 dB		
> 45 to 50 GHz	± 4.7 dB	± 3.2 dB		
Amplitude accuracy, absolute, full bypass path (FBP)				
	4a. FBP (10 dB attenuation)		4b. LNA on (0 dB attenuation)	
Frequency	Full range	20 to 30 °C	Nominal	
> 3.3 to 8.6 GHz	± 1.2 dB	± 1.0 dB	± 0.4 dB	
> 8.6 to 13.3 GHz	± 2.0 dB	± 1.6 dB	± 0.4 dB	
> 13.3 to 17.1 GHz	± 2.0 dB	± 1.6 dB	± 0.5 dB	
> 17.1 to 26.5 GHz	± 2.7 dB	± 2.3 dB	± 0.6 dB	
> 26.5 to 34.5 GHz	± 3.2 dB	± 2.5 dB	± 0.9 dB	
> 34.5 to 36.5 GHz	± 5.5 dB	± 3.0 dB	± 1.0 dB	
> 36.5 to 45.0 GHz	± 4.4 dB	± 3.0 dB		
> 45 to 50 GHz	± 4.8 dB	± 3.2 dB		

1 GHz Analysis Bandwidth (Option R10)

Specifications on this bandwidth apply with center frequencies of 700 MHz and higher. All specifications apply under the following settings unless otherwise specified: preselector bypassed, PA off, LNA off, IF gain = Auto, IF gain offset = 0 dB.

1 GHz analysis bandwidth (option R10)							
Analysis bandwidth range	10 Hz to 1.0 GHz			In practice, low end of tuning range limited to < (½*BW), by image folding and LO feedthrough. Over-range tuning to 50.5 GHz allowed, but without corrections, performance not specified.			
Tuning range	2 Hz to 50 GHz						
IF frequency	5490 MHz (1 st IF, center frequency ≤ 3.6 GHz) 690 MHz (Final IF)						
ADC sample rate	4.8 GSa/sec						
ADC resolution	14 bits						
Final data format	I & Q pairs, 32 bits each, 64 bits/Sa						
IQ-pair sample rate	1.25*IFBW						
Capture memory	16 GB						
IQ Analyzer	32,000,001 sample pairs						
Length (IQ sample pairs)	1073 MSa (2 ²⁹ Sa) with 32-bit data packing						
Maximum capture time (time record length)	3.58 s at full 1.0 GHz BW			Capture time increases linearly with decrease in bandwidth			
IF frequency response (span ≤ 1 GHz), microwave preselector bypass path (MPB)							
	3a. MPB (10 dB attenuation)			3b. LNA on (0 dB attenuation)		3c. PA on (0 dB attenuation)	
Center frequency	Full range	20 to 30 °C	RMS (nominal)	Nominal	RMS (nominal)	Nominal	RMS (nominal)
600 MHz to 3.3 GHz	± 1.80 dB	± 1.60 dB	0.10 dB	± 0.40 dB	0.10 dB	± 0.40 dB	0.13 dB
> 3.3 to 8.4 GHz	± 1.50 dB	± 1.35 dB	0.10 dB	± 0.40 dB	0.10 dB	± 0.30 dB	0.10 dB
> 8.4 to 26.5 GHz	± 1.55 dB	± 1.40 dB	0.10 dB	± 0.60 dB	0.15 dB	± 0.40 dB	0.10 dB
> 26.5 to 34.4 GHz	± 2.50 dB	± 2.30 dB	0.30 dB	± 1.00 dB	0.30 dB	± 0.60 dB	0.20 dB
> 34.4 to 48.55 GHz	± 3.85 dB	± 3.35 dB	0.35 dB	± 1.00 dB	0.30 dB	± 0.70 dB	0.30 dB
> 48.55 to 50 GHz	± 1.00 dB (nominal)		0.60 dB	± 1.00 dB	0.50 dB	± 1.00 dB	0.50 dB
IF frequency response (span ≤ 1 GHz) full bypass path (FBP)							
	4a. FBP (10 dB attenuation)			4b. LNA on (0 dB attenuation)			
Center frequency	Full range	20 to 30 °C	RMS (nominal)	Nominal		RMS (nominal)	
> 3.3 to 8.4 GHz	± 1.80 dB	± 1.70 dB	0.15 dB	± 0.55 dB		0.20 dB	
> 8.4 to 26.5 GHz	± 1.80 dB	± 1.60 dB	0.10 dB	± 0.60 dB		0.20 dB	
> 26.5 to 34.4 GHz	± 2.45 dB	± 2.30 dB	0.20 dB	± 0.70 dB		0.30 dB	
> 34.4 to 48.55 GHz	± 3.20 dB	± 2.80 dB	0.40 dB	± 1.00 dB		0.40 dB	
> 48.55 to 50 GHz	± 1.50 dB (nominal)		0.80 dB	± 1.50 dB		0.80 dB	
IF phase linearity							
Center Frequency	Span (MHz)		Preselector		RMS (nominal)		
≥ 0.02 GHz, ≤ 3.6 GHz	≤ 1000 MHz		N/A		4.00°		
3.6 to 26.5 GHz	≤ 1000 MHz		Off		1.25°		
26.5 to 50 GHz	≤ 1000 MHz		Off		2.50°		
IF dynamic range (nominal)							
SFDR (spurious-free dynamic range) (ADC related spurious)		-61 dBc		Signal at -27 dBFS, anywhere in full IF width			
IF residual responses (relative to full scale, input terminated, IF gain = high) (nominal)							
< 20 GHz			-90 dBFS				
20 to 40 GHz			-80 dBFS				
> 40 GHz			-65 dBFS				

Full scale (ADC clipping); preselector bypassed, LNA off, PA off (nominal)

Full scale (ADC clipping level) is a rough estimate of the signal level at which ADC overload occurs. Actual clipping levels vary significantly; this is only a guide. Mixer level is RF input level less attenuation setting.

Center frequency	Option		Mixer level for IF gain = low	Mixer level for IF gain = high
	508, 513 and 526	544 and 550		
< 3.3 GHz	x	x	-10 dBm	-10 dBm
> 3.3 to 13.3 GHz	x		-8 dBm	-17 dBm
> 3.3 to 13.3 GHz		x	-10 dBm	-19 dBm
> 13.3 to 26.5 GHz	x		-10 dBm	-17 dBm
> 13.3 to 26.5 GHz		x	-12 dBm	-19 dBm
> 26.5 to 50 GHz		x	-10 dBm	-15 dBm
Effect of signal frequency \neq CF			Up to ± 3.8 dB nominal	

Signal to noise ratio
(ratio of clipping level to noise level, log averaged, 1 Hz RBW, IF gain = Low) (nominal)

Center frequency	
≤ 3.6 GHz	143 dB
> 17.1 to 26.5 GHz	140 dB
> 26.5 to 50 GHz	138 dB

TOI
(3rd-order intermodulation distortion in the IF, 2 tones of equal level @ -27 dBFS (≤ 26.5 GHz) or -23 dBFS (> 26.5 GHz), 10 MHz tone separation) (nominal)

Center frequency	
< 3.3 GHz	-74 dBc
> 3.3 to 20 GHz	-74 dBc
> 20 to 26.5 GHz	-72 dBc
> 26.5 GHz to 50 GHz	-69 dBc

Noise density in IF (characterized at center of RF band and center of IF, 0 dB attenuation)

The noise level in the IF will change for frequencies away from the center of the IF. The IF part of the total noise is nominally ± 4.0 dB worse at the worst frequency within the IF bandwidth.

Center Frequency	3a. MPB		4a. FBP		3b. LNA on	
	IF gain = low	IF gain = high	IF gain = low	IF gain = high	IF gain = low	IF gain = high
700 MHz to 3.3 GHz	-145 dBm/Hz	-145 dBm/Hz	N/A	N/A	-161 dBm/Hz	-161 dBm/Hz
> 3.3 to 8.6 GHz	-146 dBm/Hz	-146 dBm/Hz	-148 dBm/Hz	-155 dBm/Hz	-158 dBm/Hz	-158 dBm/Hz
> 8.6 to 13.3 GHz	-146 dBm/Hz	-146 dBm/Hz	-147 dBm/Hz	-155 dBm/Hz	-158 dBm/Hz	-158 dBm/Hz
> 13.3 to 26.5 GHz	-144 dBm/Hz	-144 dBm/Hz	-149 dBm/Hz	-152 dBm/Hz	-153 dBm/Hz	-153 dBm/Hz
> 26.5 to 34 GHz	-143 dBm/Hz	-143 dBm/Hz	-149 dBm/Hz	-152 dBm/Hz	-152 dBm/Hz	-152 dBm/Hz
> 34 to 50 GHz	-132 dBm/Hz	-132 dBm/Hz	-145 dBm/Hz	-145 dBm/Hz	-142 dBm/Hz	-142 dBm/Hz

Spurious responses (preselector enabled for frequencies > 3.6 GHz)

Residual Responses (input terminated, 0 dB attenuation)

Center Frequency	
700 MHz to 50 GHz	-100 dBm (nominal)

Image responses

Tuned frequency (f)	Excitation frequency
10 MHz to 3.3 GHz	$f + 2 * 1\text{st IF MHz}$
	$f + 2 * \text{Final IF MHz}$
> 3.3 to 50.0 GHz	$f + 2 * \text{Final IF MHz}$

Amplitude accuracy, absolute, microwave preselector bypass path (MPB)				
	3a. MPB (10 dB attenuation)		3b. LNA on (0 dB attenuation)	3c. PA on (0 dB attenuation)
Frequency	Full range	20 to 30 °C	Nominal	Nominal
10 to 600 MHz	± 1.7 dB	± 1.4 dB	± 0.9 dB	± 0.8 dB
600 MHz to 3.3 GHz	± 1.5 dB	± 1.2 dB	± 0.4 dB	± 0.4 dB
> 3.3 to 8.6 GHz	± 1.3 dB	± 1.1 dB	± 0.4 dB	± 0.3 dB
> 8.6 to 13.3 GHz	± 2.0 dB	± 1.6 dB	± 0.4 dB	± 0.3 dB
> 13.3 to 17.1 GHz	± 2.0 dB	± 1.6 dB	± 0.5 dB	± 0.5 dB
> 17.1 to 26.5 GHz	± 2.6 dB	± 2.2 dB	± 0.5 dB	± 0.5 dB
> 26.5 to 34.5 GHz	± 3.2 dB	± 2.5 dB	± 0.9 dB	± 0.9 dB
> 34.5 to 36.5 GHz	± 5.5 dB	± 3.0 dB	± 1.2 dB	± 1.2 dB
> 36.5 to 45.0 GHz	± 4.5 dB	± 3.0 dB		
> 45 to 50 GHz	± 4.7 dB	± 3.2 dB		
Amplitude accuracy, absolute, full bypass path (FBP)				
	4a. FBP (10 dB attenuation)		4b. LNA on (0 dB attenuation)	
Frequency	Full range	20 to 30 °C	Nominal	
> 3.3 to 8.6 GHz	± 1.2 dB	± 1.0 dB	± 0.4 dB	
> 8.6 to 13.3 GHz	± 2.0 dB	± 1.7 dB	± 0.4 dB	
> 13.3 to 17.1 GHz	± 2.0 dB	± 1.7 dB	± 0.5 dB	
> 17.1 to 26.5 GHz	± 2.7 dB	± 2.4 dB	± 0.5 dB	
> 26.5 to 34.5 GHz	± 3.2 dB	± 2.6 dB	± 0.8 dB	
> 34.5 to 36.5 GHz	± 5.5 dB	± 3.0 dB	± 1.0 dB	
> 36.5 to 45.0 GHz	± 4.7 dB	± 3.0 dB		
> 45 to 50 GHz	± 5.0 dB	± 3.2 dB		

1.5 GHz Analysis Bandwidth (Option R15)

Specifications on this bandwidth apply with center frequencies of 950 MHz and higher. All specifications apply under the following settings unless otherwise specified: preselector bypassed, PA off, LNA off, IF gain = Auto, IF gain offset = 0 dB.

1.5 GHz analysis bandwidth (option R15)							
Analysis bandwidth range	10 Hz to 1.5 GHz						
Tuning range	2 Hz to 50 GHz					In practice, low end of tuning range limited to $< (\frac{1}{2} \times \text{BW})$, by image folding and LO feedthrough. Over-range tuning to 50.5 GHz allowed, but without corrections, performance not specified.	
IF frequency	5750 MHz (1st IF) 1200 MHz (Final IF: CF > 3.5 GHz) 950 MHz (Final IF: CF \leq 3.5 GHz)						
ADC sample rate	4.8 GSa/sec						
ADC resolution	14 bits						
Final data format	I & Q pairs, 32 bits each, 64 bits/Sa						
IQ-pair sample rate	1.25*IFBW						
Capture memory	16 GB						
IQ Analyzer	32,000,001 sample pairs						
Length (IQ sample pairs)	1073 MSa (2 ²⁹ Sa) with 32-bit data packing						
Maximum capture time (time record length)	1.79 s at full 10 MHz BW					Capture time increases linearly with decrease in bandwidth	
IF frequency response (span \leq 1.5 GHz), microwave preselector bypass path (MPB)							
	3a. MPB (10 dB attenuation)			3b. LNA on (0 dB attenuation)		3c. PA on (0 dB attenuation)	
Center frequency	Full range	20 to 30 °C	RMS (nominal)	Nominal	RMS (nominal)	Nominal	RMS (nominal)
850 MHz to 3.5 GHz	± 3.10 dB	± 2.80 dB	0.15 dB	± 0.50 dB	0.15 dB	± 0.50 dB	0.17 dB
> 3.5 to 7.9 GHz	± 1.45 dB	± 1.05 dB	0.10 dB	± 0.20 dB	0.10 dB	± 0.25 dB	0.10 dB
> 7.9 to 26.5 GHz	± 1.65 dB	± 1.30 dB	0.15 dB	± 0.40 dB	0.15 dB	± 0.35 dB	0.10 dB
> 26.5 to 34.4 GHz	± 2.35 dB	± 1.90 dB	0.15 dB	± 0.60 dB	0.20 dB	± 0.50 dB	0.15 dB
> 34.4 to 48.05 GHz	± 3.20 dB	± 2.70 dB	0.30 dB	± 0.70 dB	0.30 dB	± 0.70 dB	0.30 dB
> 48.05 to 50 GHz	± 1.50 dB (nominal)		0.50 dB	± 1.00 dB	0.50 dB	± 1.00 dB	0.50 dB
IF frequency response (span \leq 1.5 GHz) full bypass path (FBP)							
	4a. FBP (10 dB attenuation)			4b. LNA on (0 dB attenuation)			
Center frequency	Full range	20 to 30 °C	RMS (nominal)	Nominal	RMS (nominal)		
> 3.5 to 7.9 GHz	± 1.40 dB	± 1.05 dB	0.10 dB	± 0.25 dB	0.10 dB		
> 7.9 to 26.5 GHz	± 1.65 dB	± 1.30 dB	0.15 dB	± 0.45 dB	0.15 dB		
> 26.5 to 34.4 GHz	± 2.65 dB	± 2.20 dB	0.30 dB	± 0.85 dB	0.30 dB		
> 34.4 to 48.05 GHz	± 3.65 dB	± 3.10 dB	0.40 dB	± 1.00 dB	0.40 dB		
> 48.05 to 50 GHz	± 1.90 dB (nominal)			0.70 dB	± 1.50 dB	0.60 dB	
IF phase linearity							
Center Frequency		Span (MHz)		Preselector		RMS (nominal)	
≥ 0.02 GHz, ≤ 3.3 GHz		≤ 1500 MHz		N/A		2.00°	
IF dynamic range (IF gain = high) (nominal)							
SFDR (spurious-free dynamic range) (ADC related spurious)		< 3.5 GHz -49 dBc ≥ 3.5 GHz -54 dBc			Signal at -22 dBFS, anywhere in full IF width		
IF residual responses (relative to full scale, input terminated, IF gain = high) (nominal)							
< 3.5 GHz			-100 dBFS				
≥ 3.5 GHz to 34.5 GHz			-85 dBFS				
34.5 GHz to 50 GHz			-65 dBFS				

Full scale (ADC clipping); preselector bypassed, LNA off, PA off (nominal)

Full scale (ADC clipping level) is a rough estimate of the signal level at which ADC overload occurs. Actual clipping levels vary significantly; this is only a guide. Mixer level is RF input level less attenuation setting.

Center frequency	Option		Mixer level for IF gain = low	Mixer level for IF gain = high
	508, 513 and 526	544 and 550		
< 3.3 GHz	x	x	-12 dBm	-12 dBm
> 3.3 to 26.5 GHz	x		-8 dBm	-18 dBm
> 3.3 to 26.5 GHz		x	-10 dBm	-20 dBm
> 26.5 to 50 GHz		x	-10 dBm	-16 dBm
Effect of signal frequency \neq CF			Up to ± 5.5 dB nominal	

Signal to noise ratio
(ratio of clipping level to noise level, log averaged, 1 Hz RBW, IF gain = Low) (nominal)

Center frequency	
≤ 3.6 GHz	143 dB
> 17.1 to 26.5 GHz	141 dB
> 26.5 to 50 GHz	135 dB

TOI
(3rd-order intermodulation distortion in the IF, 2 tones of equal level @ -19 dBFS (≤ 26.5 GHz) or -15 dBFS (> 26.5 GHz to 50 GHz), 10 MHz tone separation) (nominal)

Center frequency	
<3.5 GHz	-75 dBc
> 3.5 to 20 GHz	-75 dBc
> 20 to 26.5 GHz	-70 dBc
> 26.5 GHz to 50 GHz	-69 dBc

Noise density in IF (characterized at center of RF band and center of IF, 0 dB attenuation)

The noise level in the IF will change for frequencies away from the center of the IF. The IF part of the total noise is nominally ± 2.0 dB worse at the worst frequency within the IF bandwidth.

Center frequency	3a. MPB		3b. LNA on		4a. FBP	
	IF gain = low	IF gain = high	IF gain = low	IF gain = high	IF gain = low	IF gain = high
950 MHz to 3.5 GHz	-145 dBm/Hz	-145 dBm/Hz	-160 dBm/Hz	-160 dBm/Hz	N/A	N/A
> 3.5 to 8.9 GHz	-150 dBm/Hz	-153 dBm/Hz	-160 dBm/Hz	-159 dBm/Hz	-153 dBm/Hz	-158 dBm/Hz
> 8.9 to 26.5 GHz	-147 dBm/Hz	-147 dBm/Hz	-155 dBm/Hz	-154 dBm/Hz	-152 dBm/Hz	-153 dBm/Hz
> 26.5 to 34 GHz	-143 dBm/Hz	-144 dBm/Hz	-154 dBm/Hz	-154 dBm/Hz	-152 dBm/Hz	-153 dBm/Hz
> 34 to 50 GHz	-133 dBm/Hz	-133 dBm/Hz	-145 dBm/Hz	-145 dBm/Hz	-145 dBm/Hz	-145 dBm/Hz

Spurious responses (preselector enabled for frequencies > 3.6 GHz)**Residual responses (input terminated, 0 dB attenuation)**

Center frequency	
<3.5 GHz	-100 dBm (nominal)
3.5 to 50 GHz	-90 dBm (nominal)

Image responses

Tuned frequency (f)	Excitation frequency
10 MHz to 3.3 GHz	f + 2 * 1st IF MHz
	f + 2 * Final IF MHz
> 3.3 to 50.0 GHz	f + 2 * Final IF MHz

Amplitude accuracy, absolute, microwave preselector bypass path (MPB)				
	3a. MPB (10 dB attenuation)		3b. LNA on (0 dB attenuation)	3c. PA on (0 dB attenuation)
Frequency	Full range	20 to 30 °C	Nominal	Nominal
10 to 600 MHz	± 1.8 dB	± 1.5 dB	± 0.9 dB	± 0.8 dB
600 MHz to 3.5 GHz	± 1.4 dB	± 1.1 dB	± 0.4 dB	± 0.4 dB
> 3.5 to 7.9 GHz	± 1.4 dB	± 1.1 dB	± 0.3 dB	± 0.3 dB
> 7.9 to 12.8 GHz	± 2.0 dB	± 1.5 dB	± 0.3 dB	± 0.3 dB
> 12.8 to 17.1 GHz	± 2.0 dB	± 1.5 dB	± 0.5 dB	± 0.5 dB
> 17.1 to 26.5 GHz	± 2.5 dB	± 2.2 dB	± 0.5 dB	± 0.6 dB
> 26.5 to 34.5 GHz	± 3.1 dB	± 2.4 dB	± 0.8 dB	± 0.9 dB
> 34.5 to 36.5 GHz	± 5.5 dB	± 3.1 dB	± 1.1 dB	± 1.1 dB
> 36.5 to 45.0 GHz	± 4.7 dB	± 3.1 dB		
> 45 to 50 GHz	± 4.7 dB	± 3.3 dB		
Amplitude accuracy, absolute, full bypass path (FBP)				
	4a. FBP (10 dB attenuation)		4b. LNA on (0 dB attenuation)	
Frequency	Full range	20 to 30 °C	Nominal	
> 3.5 to 7.9 GHz	± 1.2 dB	± 1.0 dB	± 0.4 dB	
> 7.9 to 12.8 GHz	± 2.0 dB	± 1.7 dB	± 0.4 dB	
> 12.8 to 17.1 GHz	± 2.0 dB	± 1.7 dB	± 0.6 dB	
> 17.1 to 26.5 GHz	± 2.7 dB	± 2.5 dB	± 0.6 dB	
> 26.5 to 34.5 GHz	± 3.2 dB	± 2.6 dB	± 1.0 dB	
> 34.5 to 36.5 GHz	± 5.5 dB	± 3.1 dB	± 1.3 dB	
> 36.5 to 45.0 GHz	± 4.6 dB	± 3.1 dB		
> 45 to 50 GHz	± 4.8 dB	± 3.3 dB		

2 GHz Analysis Bandwidth (Option R20)

Specifications on this bandwidth apply with center frequencies of 950 MHz and higher. All specifications apply under the following settings unless otherwise specified: preselector bypassed, PA off, LNA off, IF gain = Auto, IF gain offset = 0 dB.

2.0 GHz Analysis Bandwidth (option R20)							
Analysis bandwidth range	10 Hz to 2.0 GHz						
Tuning range	3.5 to 50 GHz			In practice, low end of tuning range limited to $< (\frac{1}{2}BW)$, by image folding and LO feedthrough. Over-range tuning to 50.5 GHz allowed, but without corrections, performance not specified			
IF frequency	1200 MHz (center)						
ADC sample rate	4.8 GSa/sec						
ADC resolution	14 bits						
Final data format	I & Q pairs, 32 bits each, 64 bits/Sa						
IQ-pair sample rate	1.25*IFBW						
Capture memory	16 GB						
IQ Analyzer	32,000,001 sample pairs						
Length (IQ sample pairs)	1073 MSa (2 ²⁹ Sa) with 32-bit data packing						
Capture time (time record length)	1.79 s at full 2.0 GHz BW			Capture time increases linearly with decrease in bandwidth			
IF frequency response (span ≤ 2 GHz), microwave preselector bypass path (MPB)							
	3a. MPB (10 dB attenuation)			3b. LNA on (0 dB attenuation)		3c. PA on (0 dB attenuation)	
Center frequency	Full range	20 to 30 °C	RMS (nominal)	Nominal	RMS (nominal)	Nominal	RMS (nominal)
> 3.5 to 7.9 GHz	± 1.45 dB	± 1.05 dB	0.10 dB	± 0.20 dB	0.10 dB	± 0.25 dB	0.10 dB
> 7.9 to 26.5 GHz	± 1.65 dB	± 1.30 dB	0.15 dB	± 0.40 dB	0.15 dB	± 0.35 dB	0.10 dB
> 26.5 to 34.4 GHz	± 2.35 dB	± 1.90 dB	0.15 dB	± 0.60 dB	0.20 dB	± 0.50 dB	0.15 dB
> 34.4 to 48.05 GHz	± 3.20 dB	± 2.70 dB	0.30 dB	± 0.70 dB	0.30 dB	± 0.70 dB	0.30 dB
> 48.05 to 50 GHz	± 1.50 dB (nominal)		0.50 dB	± 1.00 dB	0.50 dB	± 1.00 dB	0.50 dB
IF frequency response (span ≤ 2 GHz) full bypass path (FBP)							
	4a. FBP (10 dB attenuation)			4b. LNA on (0 dB attenuation)			
Center frequency	Full range	20 to 30 °C	RMS (nominal)	Nominal	RMS (nominal)		
> 3.5 to 7.9 GHz	± 1.40 dB	± 1.05 dB	0.10 dB	± 0.25 dB	0.10 dB		
> 7.9 to 26.5 GHz	± 1.65 dB	± 1.30 dB	0.15 dB	± 0.45 dB	0.15 dB		
> 26.5 to 34.4 GHz	± 2.65 dB	± 2.20 dB	0.30 dB	± 0.85 dB	0.30 dB		
> 34.4 to 48.05 GHz	± 3.65 dB	± 3.10 dB	0.40 dB	± 1.00 dB	0.40 dB		
> 48.05 to 50 GHz	± 1.90 dB (nominal)		0.70 dB	± 1.50 dB	0.60 dB		
IF phase linearity							
Center Frequency	Span (MHz)		Preselector		RMS (nominal)		
3.5 to 26.5 GHz	≤ 2000 MHz		Off		1.00°		
26.5 to 50 GHz	≤ 2000 MHz		Off		2.50°		
IF dynamic range (nominal)							
SFDR (spurious-free dynamic range) (ADC related spurious)		-54 dBc		Signal at -22 dBFS, anywhere in full IF width			
IF residual responses (relative to full scale, input terminated) (nominal)							
3.5 to 34.5 GHz			-85 dBFS				
34.5 to 50 GHz			-65 dBFS				

Full scale (ADC clipping); preselector bypassed, LNA off, PA off (nominal)

Full scale (ADC clipping level) is a rough estimate of the signal level at which ADC overload occurs. Actual clipping levels vary significantly; this is only a guide. Mixer level is RF input level less attenuation setting.

Center frequency	Option		Mixer level for IF gain = low	Mixer level for IF gain = high
	508, 513 and 526	544 and 550		
> 3.3 to 26.5 GHz	x		-8 dBm	-18 dBm
> 3.3 to 26.5 GHz		x	-10 dBm	-20 dBm
> 26.5 to 50 GHz		x	-10 dBm	-16 dBm
Effect of signal frequency \neq CF			Up to ± 5.5 dB nominal	

**Signal to noise ratio
(ratio of clipping level to noise level, log averaged, 1 Hz RBW, IF gain low) (nominal)**

Center frequency	
≤ 3.6 GHz	143 dB
> 17.1 to 26.5 GHz	141 dB
> 26.5 to 50 GHz	135 dB

**TOI
(3rd-order intermodulation distortion in the IF, 2 tones of equal level @ -19 dBFS (≤ 26.5 GHz) or -15 dBFS (>26.5 GHz to 50 GHz), 10 MHz tone separation)**

Center frequency	
3.5 to 20 GHz	-75 dBc
20 to 26.5 GHz	-70 dBc
26.5 to 50 GHz	-69 dBc

Noise density in IF (characterized at center of RF band and center of IF, 0 dB attenuation)

The noise level in the IF will change for frequencies away from the center of the IF. The IF part of the total noise is nominally ± 2.0 dB worse at the worst frequency within the IF bandwidth.

Center Frequency	3a. MPB		3b. LNA on		4a. FBP	
	IF gain = low	IF gain = high	IF gain = low	IF gain = high	IF gain = low	IF gain = high
> 3.5 to 8.9 GHz	-150 dBm/Hz	-153 dBm/Hz	-160 dBm/Hz	-159 dBm/Hz	-153 dBm/Hz	-158 dBm/Hz
> 8.9 to 26.5 GHz	-147 dBm/Hz	-147 dBm/Hz	-155 dBm/Hz	-154 dBm/Hz	-152 dBm/Hz	-153 dBm/Hz
> 26.5 to 34 GHz	-143 dBm/Hz	-144 dBm/Hz		-154 dBm/Hz	-152 dBm/Hz	-153 dBm/Hz
> 34 to 50 GHz	-133 dBm/Hz	-133 dBm/Hz	-145 dBm/Hz	-145 dBm/Hz	-145 dBm/Hz	-145 dBm/Hz

Spurious responses (preselector enabled for frequencies > 3.6 GHz)

Residual Responses (input terminated, 0 dB attenuation)

Center frequency	
3.5 GHz to 50 GHz	-90 dBm (nominal)

Image responses

Tuned frequency (f)	Excitation frequency
10 MHz to 3.3 GHz	f + 2 * 1st IF MHz f + 2 * Final IF MHz
> 3.3 to 50.0 GHz	f + 2 * Final IF MHz

Amplitude accuracy, absolute, microwave preselector bypass path (MPB)				
	3a. MPB (10 dB attenuation)		3b. LNA on (0 dB attenuation)	3c. PA on (0 dB attenuation)
Frequency	Full range	20 to 30 °C	Nominal	Nominal
> 3.5 to 7.9 GHz	± 1.4 dB	± 1.1 dB	± 0.4 dB	± 0.4 dB
> 7.9 to 12.8 GHz	± 2.0 dB	± 1.5 dB	± 0.4 dB	± 0.4 dB
> 12.8 to 17.1 GHz	± 2.0 dB	± 1.5 dB	± 0.5 dB	± 0.5 dB
> 17.1 to 26.5 GHz	± 2.6 dB	± 2.2 dB	± 0.6 dB	± 0.6 dB
> 26.5 to 34.5 GHz	± 3.1 dB	± 2.4 dB	± 0.9 dB	± 0.9 dB
> 34.5 to 36.5 GHz	± 5.5 dB	± 3.1 dB	± 1.3 dB	± 1.3 dB
> 36.5 to 45.0 GHz	± 4.7 dB	± 3.1 dB		
> 45 to 50 GHz	± 4.7 dB	± 3.3 dB		
Amplitude accuracy, absolute, full bypass path (FBP)				
	4a. FBP (10 dB attenuation)		4b. LNA on (0 dB attenuation)	
Frequency	Full range	20 to 30 °C	Nominal	
> 3.5 to 7.9 GHz	± 1.2 dB	± 1.0 dB	± 0.4 dB	
> 7.9 to 12.8 GHz	± 2.0 dB	± 1.7 dB	± 0.4 dB	
> 12.8 to 17.1 GHz	± 2.0 dB	± 1.7 dB	± 0.5 dB	
> 17.1 to 26.5 GHz	± 2.7 dB	± 2.5 dB	± 0.5 dB	
> 26.5 to 34.5 GHz	± 3.2 dB	± 2.6 dB	± 1.0 dB	
> 34.5 to 36.5 GHz	± 5.5 dB	± 3.1 dB	± 1.5 dB	
> 36.5 to 45.0 GHz	± 4.7 dB	± 3.1 dB		
> 45 to 50 GHz	± 5.0 dB	± 3.3 dB		

General Specifications

Temperature Range		
Operating		
Altitude ≤ 2,300 m	0 to 55 °C	
Altitude = 4,600 m	0 to 47 °C	
Derating	The maximum operating temperature derates linearly from altitude of 4,600 m to 2,300 m	
Storage	–40 to +70 °C	
Altitude	4,600 m (approx. 15,000 feet)	
Maximum relative humidity	95% up to 40°C, non-condensing. From 40 °C to 55 °C, the maximum % Relative Humidity follows the line of constant dew point.	
Environment		
Indoor use		
Power requirements		
Voltage and frequency (nominal)	100/120 V, 50/60/400 Hz 220/240 V, 50/60 Hz	The instruments can operate with mains supply voltage fluctuations up to ± 10% of the nominal voltage
Rated input power	630 W (maximum)	
Power consumption, on	560W (typical)	
Power Consumption, Standby	45 W	
Display		
Resolution	1280 x 768	
Size	269 mm (10.6 in.) diagonal (nominal) capacitive multi-touch screen	
Data storage		
Internal	Removable solid-state drive (≥ 256 GB)	
External	Supports USB 3.0/2.0 compatible memory devices	
CPU	Modular, upgradeable; Intel i7, 6-core, 1.9 GHz clock, 32 GB DDR4 DRAM; includes secure memory for instrument calibration data	
SSD (solid-state drive)	≥256 GB, removeable	
Operating system	Windows-10, Enterprise	
Weight		
Net	27 kg (59 lbs) (nominal)	
Shipping	39 kg (86 lbs) (nominal)	
Dimensions		
Height	177 mm (7.0 in)	
Width	426 mm (16.8 in)	
Length	556 mm (21.9 in)	
Calibration cycle		
The recommended calibration cycle is one year; calibration services are available through Keysight service centers.		

Inputs and Outputs

Front panel

RF input			
Standard (Option 508, 513, 526)	Type-N female, 50 Ω nominal		
Standard (Option 544, 550)	2.4 mm male, 50 Ω nominal		
Option C35 (with Option 526 only)	3.5 mm male, 50 Ω nominal		
External mixing (option EXM)			
Connector	SMA, female, 50 Ω , nominal		
Functions	Diplexer, LO output, IF input		
LO output			
Frequency range	3.75 to 14.1 GHz		
Output power	The LO output port power is compatible with Keysight M1970 and 11970 Series mixers except for the 11970K. The power is specified at the connector. Cable loss will affect the power available at the mixer. With non-Keysight/Agilent mixer units, supplied loss calibration data may be valid only at a specified LO power that may differ from the power available at the mixer. In such cases, additional uncertainties apply.		
	Center frequency	Full range	20 to 30°C
	3.75 to 8.72 GHz (LO Doubler = Off settings)	14 to 18.8 dBm	+15 to 18 dBm
	7.8 to 14.1 GHz (LO Doubler = On setting. Fundamental frequency = 3.9 to 7.05 GHz)	N/A	+14 to 18.5 dBm
Internal calibrator output			
Cal out (Option 508, 513, 526)	SMA female, 10 MHz to 26.5 GHz internal calibrator output		
Cal out (Option 544, 550)	2.4 mm female, 10 MHz to 50 GHz internal calibrator output		
Probe power			
Voltage/Current	+15 Vdc, \pm 7% at 150 mA max (nominal)		
	–12.6 Vdc, \pm 10% at 150 mA max (nominal)		
	GND		
USB ports			
Type	Description	Connector	Output Current
Standard (3)	Compatible with USB 2.0	USB Type-A female	0.5 A (nom) for ports not marked with lightning bolt 1.2 A (nom) for port marked with lightning bolt
Headphone jack			
Connector	Miniature stereo audio jack 3.5 mm		

Rear Panel

10 MHz out	
Connector	BNC female, 50 Ω (nominal)
Output amplitude	≥ 0 dBm (nominal)
Frequency	10 MHz \times (1+ frequency reference accuracy)
Ext ref in	
Connector	BNC female, 50 Ω (nominal)
Input amplitude range	Sine wave: -5 to 10 dBm (nominal) Square wave: 0.2 to 1.5 V peak-to-peak (nominal)
Input frequency	1 to 50 MHz (nominal) (selectable to 1 Hz resolution)
Frequency lock range	$\pm 2 \times 10^{-6}$ of specified external reference input frequency
Trigger 1 and 2 inputs	
Connector	BNC female, 10 k Ω (nominal)
Trigger level range	-5 to $+5$ V
Trigger 3 input (precision, for wide-bandwidth measurements only)	
Connector	SMA, female, 50 Ω (nominal)
Trigger level range	-4.5 to 4.5 V
Trigger 1 and 2 outputs	
Connector	BNC female, 50 Ω (nominal)
Trigger level range	0 to 5 V (CMOS) (nominal)
VGA (monitor output 1)	
Connector	VGA compatible, 15-pin mini D-SUB
Format	XGA (60 Hz vertical sync rates, non-interlaced) analog RGB
Resolution	1280 x 768 (Default)
DisplayPort (monitor output 2)	
Connector	Mini display port
Resolution	1280 x 768 (Default)
Noise source drive +28 V (pulsed)	
Connector	BNC female
Output Voltage On	28.0 ± 0.1 V
Output Voltage Off	< 1.0 V
SNS Series Noise Source	For use with Keysight Technologies SNS series noise sources
Connector	12 pin circular
Analog out	
Connector	BNC female, 50 Ω (nominal)
USB ports	
USB 3.0 (host, superspeed; 2 ports)	
Standard	Compatible with USB 3.0
Connector	USB Type-A female
Output current	0.9 A (nominal)
USB 2.0 (1 port)	
Standard	Compatible with USB 2.0
Connector	USB Type-A female
Output current	0.5 A (nominal)
USB 3.0 (device; 1 port)	
Standard	Compatible with USB 3.0
Connector	USB Type-B female
GPIO interface	
Connector	IEEE-488 bus connector
GPIO codes	SH1, AH1, T6, SR1, RL1, PP0, DC1, C1, C2, C3, C28, DT1, L4, C0
GPIO mode	Controller or device

PCIe X4 interface		
Connector	PCIe X4, female	
Digital bus interface		
Connector	MDR-80 This port is intended for use with the Agilent/Keysight N5105 and N5106 products only. It is not available for general purpose use.	
LAN TCP/IP interface		
Standard	1000Base-T	
Connector	RJ45 Ethertwist	
Wide IF out (enabled by option CRW)		
Connector	SMA, female, 50 Ω nominal	
AUX IF output		
Connector	SMA female, shared by CR3, CRP and ALV	
Impedance	50 Ω nominal	
AUX IF output, second IF output (option CR3)		
SA mode	322.5 MHz center frequency	
IQ analyzer with IF bandwidth ≤ 25 MHz	322.5 MHz center frequency	
IQ analyzer with IF path 40 MHz	250 MHz center frequency	
IQ analyzer with IF path 255 MHz or 1 GHz	690 MHz center frequency	
IQ analyzer with IF path 1.5 GHz	950 MHz (band 0), 1200 MHz (band 1 to 4)	
IQ analyzer with IF path 2 GHz	1200 MHz center frequency	
Conversion gain (SA mode and up to 40 MHz bandwidth)	−1 to +4 dB (nominal) plus RF frequency response	
Bandwidth (-6 dB)		
< 3.6 GHz	Up to 1 GHz (nominal)	
> 3.6 GHz, with preselector	Depends on RF center frequency	
> 3.6 GHz, with preselector bypass	100-800 MHz ±3 dB (nominal)	
AUX IF output, programmable (Option CRP) (only available in swept spectrum analysis or IF path ≤ 40 MHz)		
Bandwidth		
Highpass corner frequency	5 MHz (nominal) at −3dB	
Lowpass corner frequency	120 MHz (nominal) at −3dB	
Output at 70 MHz		
< 3.6 GHz or >3.6 GHz with preselector bypassed	100 MHz nominal	
Preselected band	Depends on RF center frequency	
IF output center frequency		
Range	10 to 75 MHz (user selectable)	
Resolution	0.5 MHz	
Conversion gain	−1 to +4 dB (nominal) plus RF frequency response	
Lower output frequencies	Subject to folding	
Residual output signals	≤ −88 dBm (nominal)	
AUX IF output, Fast Log Video (Option ALV)		
General Port Specifications		
Connector	SMA female	Shared with other options
Impedance	50 Ω nominal	
Fast Log Video Output		
Output voltage	Open-circuit voltages	
Maximum	1.6 V at −10 dBm nominal	
Slope	25 ± 1 mV/dB nominal	
Rise Time	15 ns nominal	
Fall Time	40 ns nominal	

Y-axis video output (Option YAV)		
General port specifications		
Connector	BNC female	Shared with other options
Impedance	50 Ω nominal	
Screen Video		
Display scale types	Log or Lin	“Lin” is linear in voltage
Log scales	All (0.1 to 20 dB/div)	
Modes	Spectrum analyzer only	
Gating	Gating must be off	
Output scaling	0 to 1.0 V open circuit, representing bottom to top of screen	
Offset	\pm 1% of full scale (nominal)	
Gain accuracy	\pm 1% of output voltage (nominal)	
Log Video (log envelope) Output		
Amplitude Range (terminated with 50 Ω)		
Maximum	1.0 V (nominal) for -10 dBm at the mixer	
Scale factor	Output changes 1 V per 192.66 dB change in the signal envelope	
Bandwidth	Set by RBW	
Operating conditions	Select Sweep Type = Swept	
Linear Video (AM demod) Output		
Amplitude Range (terminated with 50 Ω)		
Maximum	1.0 V (nominal) for signal envelope at the reference level	
Minimum	0 V	
Scale factor	If carrier level is set to half the reference level in volts, the scale factor is 200% of carrier level per volt. Regardless of the carrier level, the scale factor is 100% of reference level per volt.	
Bandwidth	Set by RBW	
Operating conditions	Select Sweep Type = Swept	









Regulatory Information

This product is designed for use in INSTALLATION CATEGORY II and POLLUTION DEGREE 2 and MEASUREMENT CATEGORY NONE per IEC 61010-1, and 664 respectively.

This product has been designed and tested in accordance with accepted industry standards and has been supplied in a safe condition. The instruction documentation contains information and warnings which must be followed by the user to ensure safe operation and to maintain the product in a safe condition.

This product is intended for indoor use.

Safety and Regulatory Markings Which May Be on the Product

	The CE mark is a registered trademark of the European Community (if accompanied by a year, it is the year when the design was proven). This product complies with all relevant directives.
ccr.keysight@keysight.com	The Keysight email address is required by EU directives applicable to our product.
CAN ICES/NMB-001(A)	"This ISM device complies with Canadian ICES-001." "Cet appareil ISM est conforme a la norme NMB du Canada."
ISM 1-A (GRP.1 CLASS A)	This is a symbol of an Industrial Scientific and Medical Group 1 Class A product. (CISPR 11, Clause 4)
	The CSA mark is a registered trademark of the CSA International.
	The RCM mark is a registered trademark of the Australian Communications and Media Authority.
	UK conformity mark is a UK government owned mark. When affixed to the product is declaring all applicable Directives and Regulations have been met in full.
	This symbol indicates separate collection for electrical and electronic equipment mandated under EU law as of August 13, 2005. All electric and electronic equipment are required to be separated from normal waste for disposal (Reference WEEE Directive 2002/96/EC).
	China RoHS regulations include requirements related to packaging and require compliance to China standard GB18455-2001.
	This symbol indicates compliance with the China RoHS regulations for paper/fiberboard packaging.
	More than one person is required to safely lift or carry this instrument. Alternately a mechanical lift can be used to eliminate the risk of personal injury.



South Korean Certification (KC) mark; includes the marking's identifier code: R-R-Kst-xxxxxxx



This symbol indicates the presence of a class 1 Laser device.

Regulatory, Environmental and Certifications

EMC

Complies with the essential requirements of the European EMC Directive and the UK Electromagnetic Compatibility Regulations 2016 as well as current editions of the following standards (dates and editions are cited in the Declaration of Conformity):

IEC/EN 61326-1

CISPR 11 Group 1, Class A

AS/NZS CISPR 11

ICES/NMB-001

UKCA

This ISM device complies with Canadian ICES-001

Cet appareil ISM est conforme a la norme NMB-001 du Canada

NOTE: This is a sensitive measurement apparatus by design and may have some performance loss (up to 40 dBm in the range 80 MHz to 6 GHz; above the Spurious Responses, Residual Responses specification of -100 dBm) when in the presence of ambient electromagnetic field of 3V/m.

South Korean Class A EMC declaration

This equipment has been conformity assessed for use in business environments. In a residential environment this equipment may cause radio interference.

This EMC statement applies to the equipment only for use in business environment.

사용자 안내문

이 기기는 업무용 환경에서 사용할 목적으로 적합성평가를 받은 기기로서 가정용 환경에서 사용하는 경우 전파간섭의 우려가 있습니다.

※ 사용자 안내문은 "업무용 방송통신기자재"에만 적용한다.

Safety

Complies with the essential requirements of the European Low Voltage Directive as well as current editions of the following standards (dates and editions are cited in the Declaration of Conformity):

IEC/EN 61010-1

Canada: CSA C22.2 No. 61010-1

USA: UL std no. 61010-1

WARNING

"WARNING: EMBEDDED CLASS 1 INVISIBLE LASER RADIATION. DO NOT EXPOSE USERS OR VIEW DIRECTLY WITH TELESCOPES"

Acoustic statement
(European Machinery
Directive)

Acoustic noise emission
LpA < 70 dB
Operator position
Normal operation mode per ISO 7779

Acoustic noise - more information
(Values given are per ISO 7779 standard in the "Operator Sitting" position)

Ambient temperature (< 40 °C)
Nominally under 55 dBA Sound Pressure. 55 dBA is generally considered suitable for use in quiet office environment

Ambient temperature (≥ 40 °C)
Nominally under 65 dBA Sound Pressure. 65 dBA is generally considered suitable for use in noisy office environment

Environmental stress

Samples of this product have been type tested in accordance with the Keysight Environmental Test Manual and verified to be robust against the environmental stresses of storage, transportation, and end-use; those stresses include, but are not limited to, temperature, humidity, shock, vibration, altitude, and power line conditions; test methods are aligned with IEC 60068-2 and levels are similar to MILPRF-28800F Class 3.

To find a current **Declaration of Conformity** for a specific Keysight product, go to:

<http://www.keysight.com/go/conformity>

Additional Resources

The N9032B PXA X-Series signal analyzer isn't the only thing that will bring you to RF breakthroughs. Powerful software drives your measurements while finely tuned hardware takes them to new heights. In order to move the measurement plane to your device under test, reach even higher levels of measurement accuracy, and achieve 2 GHz of signal analysis and generation, the N9032B PXA partners with the:

- [PathWave X-Series measurement applications](#) and [PathWave Vector Signal Analysis \(VSA\)](#)
- [U9361 RCal](#) receiver calibrator for improved receiver test system accuracy by 10X
- [M9484C VXG](#) signal generator for wideband stimulus and response testing

N9032B PXA Signal Analyzer Configuration Guide ([3121-1216.EN](#))

www.keysight.com/find/N9032B



Keysight enables innovators to push the boundaries of engineering by quickly solving design, emulation, and test challenges to create the best product experiences. Start your innovation journey at www.keysight.com

This information is subject to change without notice. © Keysight Technologies, 2021 - 2023, Published in USA, February 15, 2023, 3121-1222.EN